




S80S



S80SM

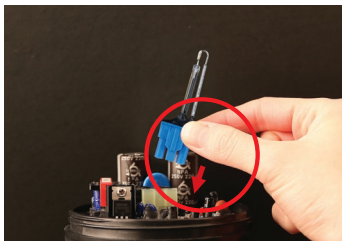

Xenon lamp replacement instructions

Convenient lamp replacement with connector lamp type. Lamp replacement is safe after the product is Powered off for 30 mins.

Customization

- AC Type(S80SM)
- Wall mount bracket options(S80S)
- Bracket structure allows for threading through the bracket hole or into the wall mount



Wall Mount Bracket TWS80



Wall Mount Bracket TWA80

PRODUCT SPECIFICATION

S80S | S80SM

Materials Lens-AS, Housing-ABS

Ambient operating temperature -30°C to +50°C

Protection rating IP54

Flashing rate 60-80/min

- Ø80mm xenon lamp strobe signal lights
- High efficiency strobe light that offers excellent outdoor visibility and long-distance signal light luminance close to natural light
- Lamp connector fastening structure allows for convenient lamp replacement



S80S Xenon Lamp Strobe Signal Lights

Model number	Voltage	Current	Xenon lamp			Certificates	Weight	Color
			Spec	Standard	Parts no			
S80S	DC12V-24V	Max. 490mA	220V -350V	BGA2120 -BBC Itype	47	CE	0.21kg	● R-Red
	AC110V	100mA					0.21kg	● A-Amber
	AC220V	90mA					0.21kg	● G-Green ● B-Blue

※ DC type model has a free-voltage range of 10V-30V

※ CE compliant: DC12V-24V



S80SM Xenon Lamp Strobe Light Equipped with Magnet

Model number	Voltage	Current	Xenon lamp			Certificates	Weight	Color
			Spec	Standard	Parts no			
S80SM	DC12V-24V	Max. 490mA	220V -350V	BGA2120 -BBC Itype	47	CE	0.24kg	● R-Red
							0.24kg	● A-Amber ● G-Green ● B-Blue



※ DC type model has a free-voltage range of 10V-30V

※ CE compliant: DC12V-24V



Technical Diagram

Units: mm

·S80S

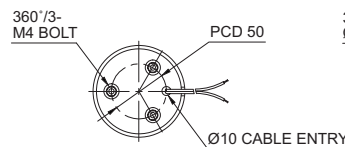

·S80SM

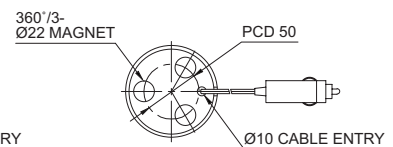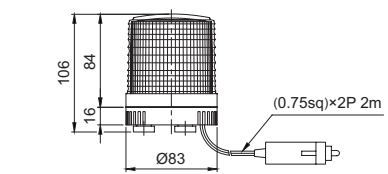

Wiring Instructions

- External Power line(S80S) UL1015 AWG18(0.75sq) x 2C 400mm
- External Power line (S80M) Cigarette lighter plug, IEC42(0.75sq) x 2P 2m
- This product can be wired regardless of polarity.

Ordering Specification

S80S	-	12/24	-	R
[Model number]		[Voltage]		[Color]
S80S S80SM		12/24-DC12V-24V 110-AC110V 220-AC220V		● R-Red ● A-Amber ● G-Green ● B-Blue