

Ø60mm Ethernet LED Tower Lights


QTG60(M)L-ETN



Remote control through internet or local area network

QTG60(M)L-ETN Ø60mm Ethernet LED Tower Lights

Model number	Layers	Voltage	Certificates	Color
QTG60(M)L-ETN-BZ QTGA60(M)L-ETN-BZ (BZ: 5 buzzer sound)	1	DC12V DC24V AC110V-220V	CE	R-Red
	2	DC12V DC24V AC110V-220V		R-Red G-Green
	3	DC12V DC24V AC110V-220V		R-Red A-Amber G-Green
	4	DC12V DC24V AC110V-220V		R-Red A-Amber G-Green B-Blue
	5	DC12V DC24V AC110V-220V		R-Red A-Amber G-Green B-Blue W-White

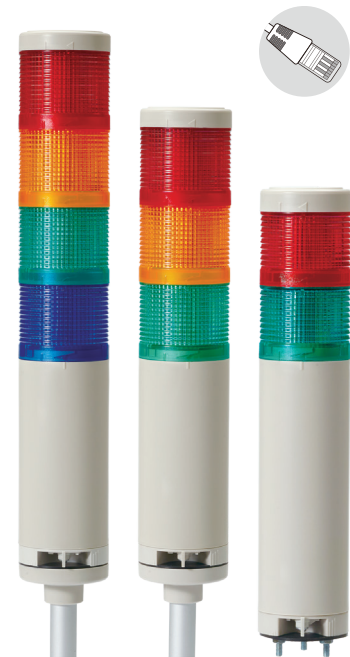

QTG60(M)L-ETN Series


Light source/buzzer current(based on 1 layer)

Voltage	DC12V	DC24V	AC110V-220V
Light source current(1 layer)	0.285A	0.300A	Max.0.075A
Buzzer current	0.215A	0.245A	Max.0.055A


Technical Diagram

Units : mm

·QTG60L-ETN-BZ

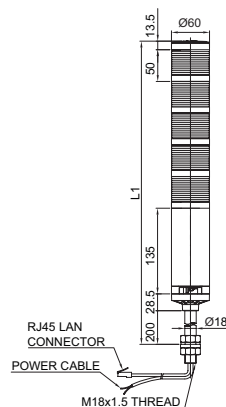

·QTG60ML-ETN-BZ

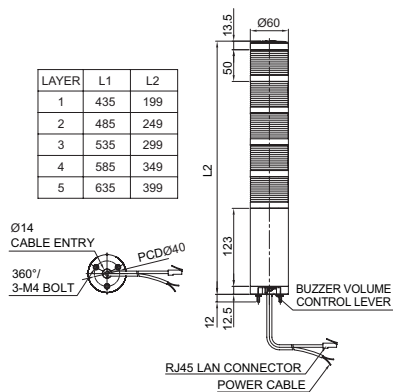

Wiring Instructions

- Customized color arrangement available
- Customized pole length available
- Wall mount bracket



Wall mount bracket TWS45



Wall mount bracket TWA45

Ordering Specifications

QTG60L-ETN-BZ	3	24	RAG	LW18
[Model number]	[Layers]	[Voltage]	[Color]	[Bracket]
QTG60L-ETN-BZ	1-1 Layers	12-DC12V	R-Red	None-Standard
QTG60ML-ETN-BZ	2-2 Layers	24-DC24V	A-Amber	Bracket
QTGA60L-ETN-BZ	3-3 Layers	110/220-AC110V-220V	G-Green	-LB18 -LW18
QTGA60ML-ETN-BZ	4-4 Layers		B-Blue	-QZ18 -SZ18
	5-5 Layers		W-White	-QL18 -SL18

Wiring Instructions

- Apply properly rated voltage through the POWER CABLE
- Connect the RJ45 connector of the UTP cable into the PC's Ethernet port or router
- External power line
UL1015 AWG18(0.75sq) x 2C 400mm
- Power plug will be provided in case of AC type
- UTP cable: Category 5 cable

Mounting bracket

Standard	LB24	LW24	QZ24
Steel	Steel	ABS	ABS
SZ24	QL24	SL24	
Al	ABS	Al	

※ Please refer to [Tower Light Mounting Bracket] on this catalogue for detailed dimensions