


S80 Series



PRODUCT SPECIFICATION

S80DRK | S80LRK

Materials Lens-AS, Housing-ABS,
Reflector-Heat resistant ABS
Ambient operating temperature -20°C to +50°C
Protection rating IP44
Revolving speed 120-140RPM
Compliant with RoHS directive

- Ø80mm LED revolving warning lights
- Adopts a special Power transmission system that reduces noise and wear
- Circular mount bracket allows convenient installation
- No buzzer allowed




S80DRK

S80DRK / S80LRK LED Revolving Warning Lights

Model number	Voltage	Current	Certificates	Weight	Color
S80DRK S80LRK	DC12V	0.183A	-	0.24kg	● R-Red
	DC24V	0.127A		0.24kg	● A-Amber
	AC110V	0.035A		0.43kg	● G-Green
	AC220V	0.025A		0.43kg	● B-Blue

Technical Diagram

Units: mm

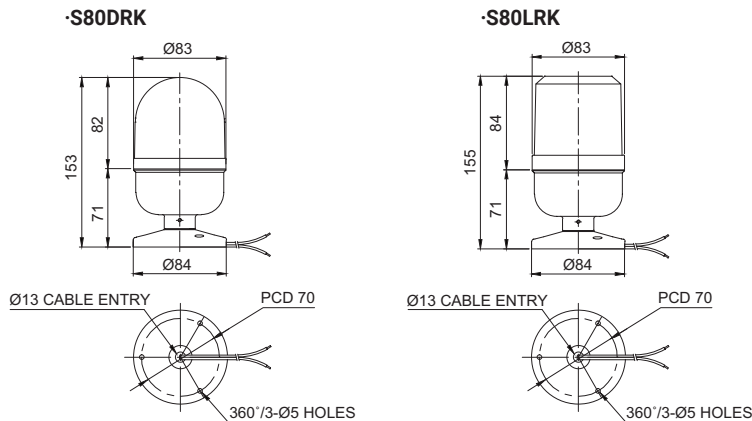

S80LRK

Customization

· Pole mount type

Standard	LB18	LW18	QZ18	SZ18	QL18	SL18
Steel	Steel	ABS	ABS	Al	ABS	Al

※ Please refer to [Tower Light Mounting Bracket] on this catalogue for detailed dimensions

· AC compatible type: Could select AC110V or AC220V by connecting 2 Power lines of 3 wires each.

Wiring Instructions

- External Power line
UL1015 AWG18(0.75sq) x 2C 400mm
- DC Type
: Black output line is negative (-)
- AC compatible type shall be connected the black and white wires when using AC110V, and the black and red wires when using AC220V.

Ordering Specification

S80DRK	-	24	-	R
[Model number]		[Voltage]		[Color]
S80DRK S80LRK		12-DC12V 24-DC24V 110-AC110V 220-AC220V		● R-Red ● A-Amber ● G-Green ● B-Blue