





ST45MB : AC/DC  
ST45MB-BZ : DC  
ST45MBF : DC

ST45MBF-BZ : AC  
ST45MBF : AC  
ST45MBF-BZ : AC

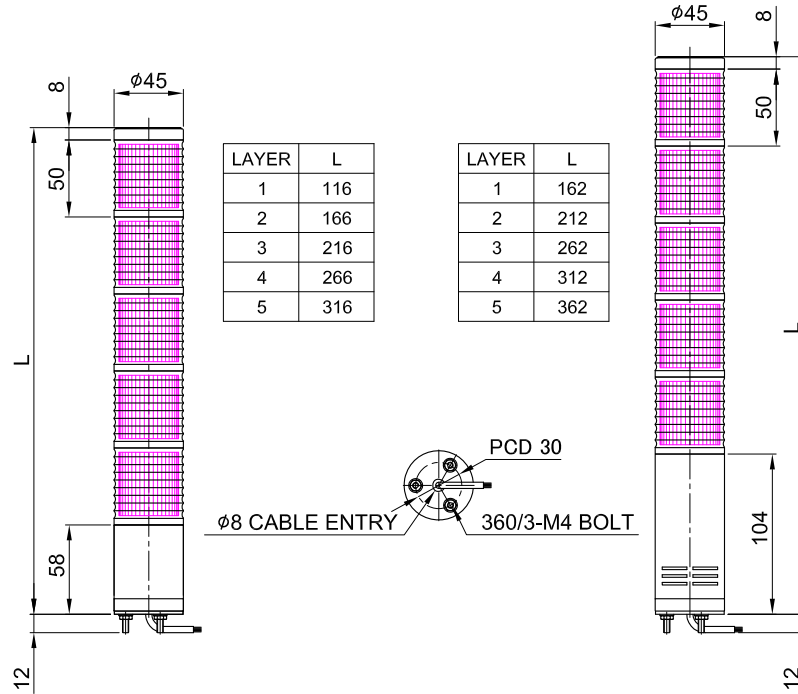

MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO			ST45MB			
MATERIAL			HOUSING-ABS			
			LENS-AS			
			POLE-AL			
COLOR OF LENS			RED(    ), AMBER(    ), GREEN(    ), BLUE(    ), WHITE(    )			
FLASH PER MIN.			60 ~ 80			
USE VOLT.	BULB	CURRENT	DC12V	5W	MAX. 0.398A	LAYER1
			DC24V		MAX. 0.212A	LAYER1
			AC110V		MAX. 0.048A	LAYER1
			AC220V		MAX. 0.023A	LAYER1
VOLUME			MAX. 90dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP44(Buzzer Type IP23)			
CABLE ENTRY			ø8 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			BULB STEADY/ FLASHING SIGNAL TOWER LAMP			

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓒ	v		Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY
	0.5~3	±0.05	±0.1	±0.2	-	DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
	3~6			±0.3	±0.5	S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30	
	6~30	±0.1	±0.2	±0.5	±1	TITLE			MODEL			
	30~120	±0.15	±0.3	±0.8	±1.5	ST45MB OUTLINE DRAWING			ST45MB			
	120~400	±0.2	±0.5	±1.2	±2.5				DWG. NO.			
400~1000	±0.3	±0.8	±2	±4	ST45MB_OUT							
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°			SCALE	SIZE	REV	SHEET	
	10~50	±0°30'		±1°	±2°			N/S	A4	00	1/1	
	50~120	±0°20'		±0°30'	±1°							
	120~400	±0°10'		±0°13'	±0°30'							