
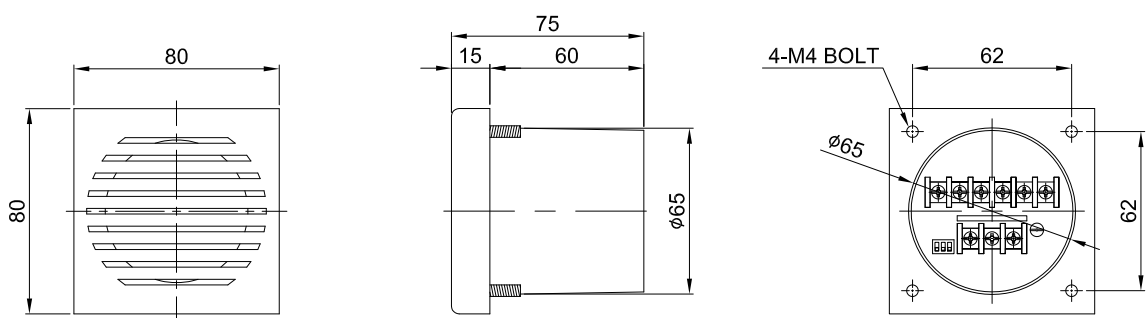



MARK	DATE	REVISION	REVISER	APP .BY
△				
△				
△				

MODEL NO		SPK		
MATERIAL		HOUSING-ABS		
		COVER-ABS		
USE VOLT.	CURRENT	DC12V	0.288A	
		DC24V	0.155A	
		AC110V	0.036A	
		AC220V	0.018A	
VOLUME		MAX. 85dB at 1m		
PROTECTION GRADE		WATER & DUST PROOF IP23		
CABLE ENTRY		TERMINAL		
COLOR		MAKER STANDARD		



ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QT'Y	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY S.H.KIM	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2022.01.12
	3~6			±0.3	±0.5							
	6~30	±0.1	±0.2	±0.5	±1							
	30~120	±0.15	±0.3	±0.8	±1.5							
	120~400	±0.2	±0.5	±1.2	±2.5							
400~1000	±0.3	±0.8	±2	±4								
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°				DWG. NO. SPK_OUT			
	10~50	±0°30'		±1°	±2°				SCALE N/S			
	50~120	±0°20'		±0°30'	±1°				SIZE A4			
	120~400	±0°10'		±0°13'	±0°30'				REV 01			
SHEET 1/1												