



ST56L : AC/DC  
ST56L-BZ : DC  
ST56LF : DC

ST56L-BZ : AC  
ST56LF : AC  
ST56LF-BZ : AC/DC

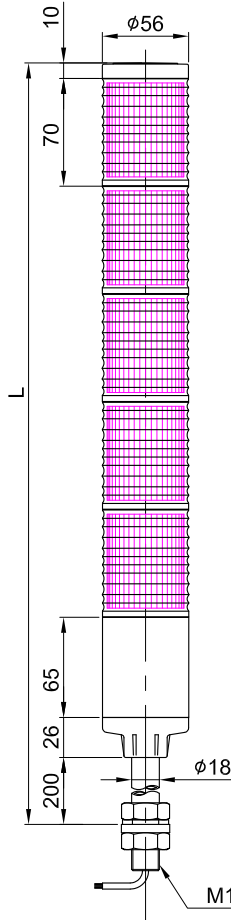

LAYER	L
1	371
2	441
3	511
4	581
5	651

LAYER	L
1	436
2	506
3	576
4	646
5	716

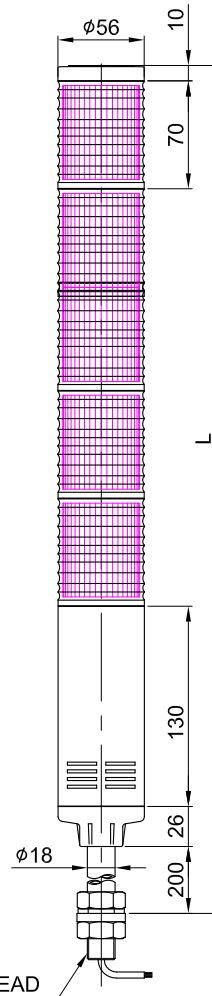

ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS	0.5~3	f	m	Ⓢ	v
	3~6	±0.05	±0.1	±0.2	±0.5
	6~30	±0.1	±0.2	±0.5	±1
	30~120	±0.15	±0.3	±0.8	±1.5
	120~400	±0.2	±0.5	±1.2	±2.5
	400~1000	±0.3	±0.8	±2	±4
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°
	10~50	±0°30'		±1°	±2°
	50~120	±0°20'		±0°30'	±1°
	120~400	±0°10'		±0°13'	±0°30'

SURFACE  
FINISH

-	-	-	-	1	-
Nr.	DWG. NO.	TITLE/ NAME		MAT'L	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30
TITLE			MODEL		
ST56L OUTLINE DRAWING			ST56L		
			DWG. NO.		
			ST56L_OUT		
SCALE		SIZE	REV	SHEET	
N/S		A4	00	1/1	

MARK	DATE	REVISION	REVISER	APP .BY
1				
2				
3				

MODEL NO			ST56L			
MATERIAL			HOUSING-ABS			
			LENS-AS			
			POLE-AL			
COLOR OF LENS			RED(    ), AMBER(    ), GREEN(    ), BLUE(    ), WHITE(    )			
FLASHING PER MIN.			60 ~ 80			
USE VOLT.	LED	CURRENT	DC12V	0.08W	MAX. 0.120A	LAYER1
			DC24V		MAX. 0.080A	LAYER1
			AC110V		MAX. 0.048A	LAYER1
			AC220V		MAX. 0.024A	LAYER1
KIND OF SOUND			WS	5 Warning Sounds		
			WM	5 Melodie		
			WA	5 Alarms		
VOLUME			MAX. 90 dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP44(Buzzer Type IP23)			
CABLE ENTRY			ø8 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			LED STEADY/ FLASHING SIGNAL TOWER LAMP			