


ST56MB : AC/DC
ST56MB-BZ : DC
ST56MBF : DC

ST56MB-BZ : AC
ST56MBF : AC
ST56MBF-BZ : AC

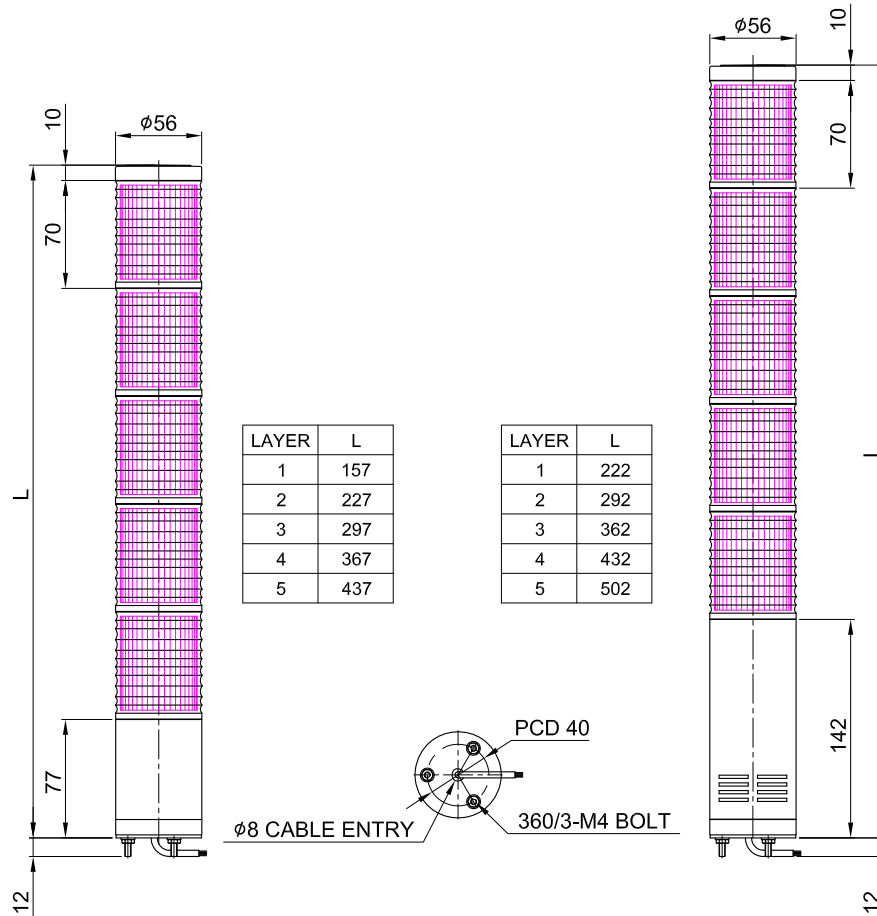

MARK	DATE	REVISION	REVISER	APP.BY
1				
2				
3				

MODEL NO			ST56MB			
MATERIAL			HOUSING-ABS			
			LENS-AS			
			-			
COLOR OF LENS			RED(), AMBER(), GREEN(), BLUE(), WHITE()			
FLASHING PER MIN.			60 ~ 80			
USE VOLT.	BULB	CURRENT	DC12V	10W	MAX. 0.925A	LAYER1
			DC24V		MAX. 0.541A	LAYER1
			AC110V		MAX. 0.095A	LAYER1
			AC220V		MAX. 0.046A	LAYER1
			VOLUME			MAX. 90dB at 1m
PROTECTION GRADE			WATER & DUST PROOF IP44(Buzzer Type IP23)			
CABLE ENTRY			ø8 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			BULB STEADY/ FLASHING SIGNAL TOWER LAMP			

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH		-		1		-	
FOR LINEAR DIMENSIONS	0.5~3	f	m	⊙	v			Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	3~6	±0.05	±0.1	±0.2	±0.5			DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	6~30	±0.1	±0.2	±0.5	±1			S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30
	30~120	±0.15	±0.3	±0.8	±1.5			TITLE		ST56MB		MODEL	
	120~400	±0.2	±0.5	±1.2	±2.5			OUTLINE DRAWING				ST56MB	
	400~1000	±0.3	±0.8	±2	±4								
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°					ST56MB_OUT			
	10~50	±0°30'		±1°	±2°								
	50~120	±0°20'		±0°30'	±1°								
	120~400	±0°10'		±0°13'	±0°30'								

Qlight