



ST80MB : AC/DC
ST80MBF : AC/DC

ST80MB-BZ : AC/DC
ST80MBF-BZ : AC/DC

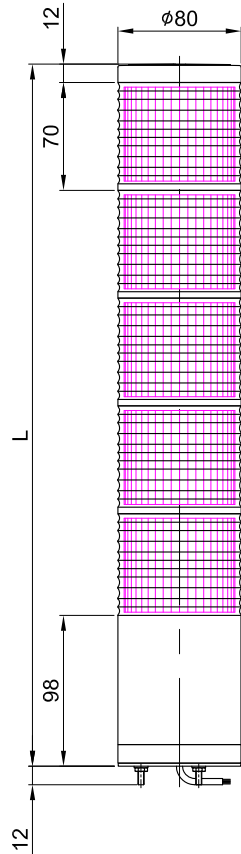

LAYER	L
1	180
2	250
3	320
4	390
5	460

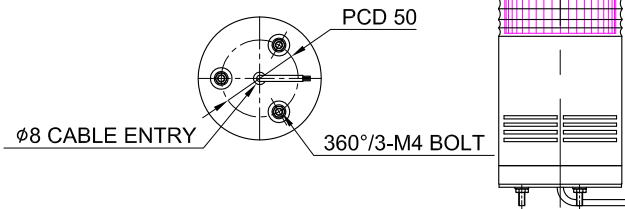

MARK	DATE	REVISION	REVISER	APP .BY
1				
2				
3				

MODEL NO			ST80MB			
MATERIAL			HOUSING-ABS			
			LENS-AS			
			-			
COLOR OF LENS			RED(), AMBER(), GREEN(), BLUE(), WHITE()			
FLASHING PER MIN.			60 ~ 80			
USE VOLT.	BULB	CURRNT	DC12V	10W	MAX. 0.925A	LAYER1
			DC24V		MAX. 0.514A	LAYER1
			AC110V		MAX. 0.095A	LAYER1
			AC220V		MAX. 0.046A	LAYER1
VOLUME			MAX. 90dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP44(Buzzer Type IP23)			
CABLE ENTRY			ø8 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			BULB STEADY/ FLASHING SIGNAL TOWER LAMP			

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH		-		-		-		1	-
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v			Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY	REFERENCE	
	0.5~3	±0.05	±0.1	±0.2	±0.5			DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE		
	3~6			±0.3	±0.5			S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30		
	6~30	±0.1	±0.2	±0.5	±1			TITLE		ST80MB		MODEL		ST80MB	
	30~120	±0.15	±0.3	±0.8	±1.5			OUTLINE DRAWING							
	120~400	±0.2	±0.5	±1.2	±2.5			Qlight				DWG. NO.		ST80MB_OUT	
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4										
	0~10	±1°		±1°30'	±3°										
	10~50	±0°30'		±1°	±2°										
	50~120	±0°20'		±0°30'	±1°										
	120~400	±0°10'		±0°13'	±0°30'							SCALE	SIZE	REV	SHEET
												N/S	A4	00	1/1