




LAYER	L
1	277
2	373
3	469

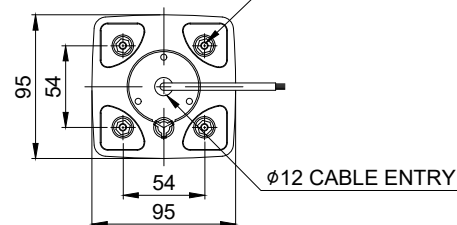

ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v
	0.5~3	±0.05	±0.1	±0.2	-
	3~6			±0.3	±0.5
	6~30	±0.1	±0.2	±0.5	±1
	30~120	±0.15	±0.3	±0.8	±1.5
	120~400	±0.2	±0.5	±1.2	±2.5
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4
	0~10	±1°		±1°30'	±3°
	10~50	±0°30'		±1°	±2°
	50~120	±0°20'		±0°30'	±1°
	120~400	±0°10'		±0°13'	±0°30'

SURFACE FINISH

-		-		-		-		1	-		
Nr.		DWG. NO.		TITLE/ NAME		MAT'L		QTY	REFERENCE		
DSND BY		CHKD BY		CHKD BY		APRV BY		VIEW	DATE		
Y.C.KO		J.H.PARK				J.K.HAN		3	2020.09.22.		
TITLE						MODEL					
SJD						SJD					
OUTLINE DRAWING											
						DWG. NO.					
						SJD_OUT					
						SCALE		SIZE		REV	
N/S		A4		00		1/1					

MARK	DATE	REVISION	REVISER	APP. BY
1				
2				
3				

MODEL NO			SJD			
MATERIAL			HOUSING-ABS			
			LENS-AS			
			REFLECTOR-HEAT RESISTING ABS			
COLOR OF LENS			RED(), AMBER(), GREEN()			
REV. PER MIN.			120 ~ 140			
USE VOLT.	BULB	CURRENT	DC12V	5W	0.751A	LAYER1
			DC24V		0.521A	LAYER1
			AC110V		0.164A	LAYER1
			AC220V		0.082A	LAYER1
KIND OF SOUND			WS	5 Warning Sounds		
			WM	5 Melodie		
			WA	5 Alarms		
			WV	5 Customizable sounds		
VOLUME			MAX. 90dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP23			
CABLE ENTRY			ø12 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			BULB REVOLVING WARNING LIGHT			