




LAYER	L
1	277
2	373
3	469

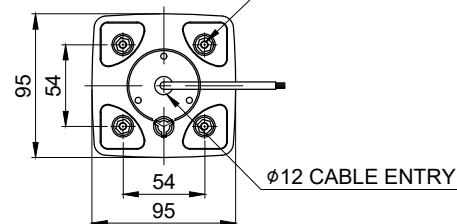

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v	
	0.5~3	±0.05	±0.1	±0.2	-	
	3~6	±0.05	±0.1	±0.3	±0.5	
	6~30	±0.1	±0.2	±0.5	±1	
	30~120	±0.15	±0.3	±0.8	±1.5	
	120~400	±0.2	±0.5	±1.2	±2.5	
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4	
	0~10	±1°		±1°30'	±3°	
	10~50	±0°30'		±1°	±2°	
	50~120	±0°20'		±0°30'	±1°	
	120~400	±0°10'		±0°13'	±0°30'	

MARK	DATE	REVISION	REVISER	APP. BY
1				
2				
3				

MODEL NO			SJD				
MATERIAL			HOUSING-ABS				
			LENS-AS				
			REFLECTOR-HEAT RESISTING ABS				
COLOR OF LENS			RED(), AMBER(), GREEN()				
FLASHING PER MIN.			60 ~ 80				
USE VOLT.	LED	CURRENT	DC12V ~ DC24V		0.08W	MAX. 0.340A	LAYER1
			AC110V				0.125A
			AC220V			0.065A	LAYER1
KIND OF SOUND			WS	5 Warning Sounds			
			WM	5 Melodie			
			WA	5 Alarms			
			WV	5 Customizable sounds			
VOLUME			MAX. 90dB at 1m				
PROTECTION GRADE			WATER & DUST PROOF IP23				
CABLE ENTRY			ø12 LEAD HOLE				
COLOR OF HOUSING			MAKER STANDARD				
ACTION			LED STEADY/FLASHING LIGHT				

-	-	-		-	1	-
Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
Y.C.KO	J.H.PARK		J.K.HAN	3	2020.09.22.	
TITLE			MODEL			
SJD			SJD			
OUTLINE DRAWING			SJD_OUT			
			DWG. NO.			
			SCALE			
			SIZE	REV	SHEET	
			N/S	A4	00	1/1