




LAYER	L
1	277
2	373
3	469

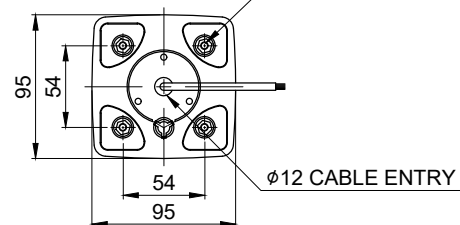

ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v
	0.5~3			±0.2	-
	3~6	±0.05	±0.1	±0.3	±0.5
	6~30	±0.1	±0.2	±0.5	±1
	30~120	±0.15	±0.3	±0.8	±1.5
	120~400	±0.2	±0.5	±1.2	±2.5
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4
	0~10	±1°		±1°30'	±3°
	10~50	±0°30'		±1°	±2°
	50~120	±0°20'		±0°30'	±1°
	120~400	±0°10'		±0°13'	±0°30'

SURFACE FINISH

-		-		-		-		1	-		
Nr.		DWG. NO.		TITLE/ NAME		MAT'L		QTY	REFERENCE		
DSND BY		CHKD BY		CHKD BY		APRV BY		VIEW	DATE		
Y.C.KO		J.H.PARK				J.K.HAN		3	2020.09.22.		
TITLE						MODEL					
SJDS						SJDS					
OUTLINE DRAWING											
						DWG. NO.					
						SJDS_OUT					
						SCALE		SIZE		REV	
N/S		A4		00		1/1					

MARK	DATE	REVISION	REVISER	APP. BY
1				
2				
3				

MODEL NO			SJDS				
MATERIAL			HOUSING-ABS				
			LENS-AS				
			-				
COLOR OF LENS			RED(), AMBER(), GREEN()				
FLASHING PER MIN.			60 ~ 80				
USE VOLT.	XENON	CURRENT	DC12V		0.08W	MAX. 0.990A	LAYER1
			DC24V				
			AC110V			0.195A	LAYER1
			AC220V			0.140A	LAYER1
KIND OF SOUND			WS	5 Warning Sounds			
			WM	5 Melodie			
			WA	5 Alarms			
			WV	5 Customizable sounds			
VOLUME			MAX. 90dB at 1m				
PROTECTION GRADE			WATER & DUST PROOF IP23				
CABLE ENTRY			φ12 LEAD HOLE				
COLOR OF HOUSING			MAKER STANDARD				
ACTION			XENON STROBE WARNING LIGHT				