



STDL/STDLF

LAYER	L
1	235
2	305
3	375
4	445
5	515

ø8 CABLE ENTRY



360°/3-M5 BOLT

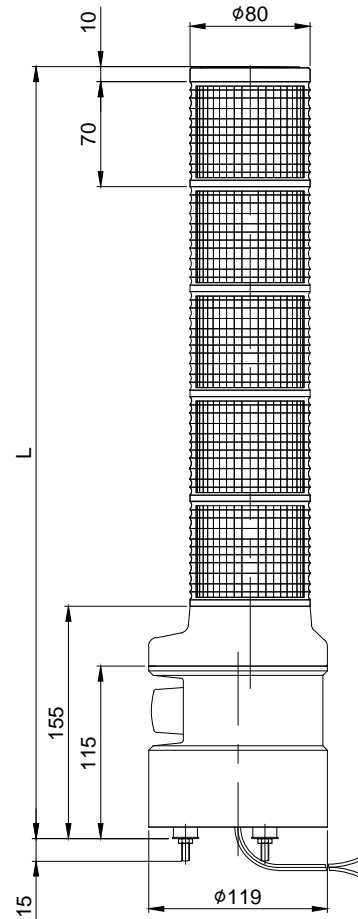

ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS		f	m	(C)	v
	0.5~3	±0.05	±0.1	±0.2	-
	3~6			±0.3	±0.5
	6~30	±0.1	±0.2	±0.5	±1
	30~120	±0.15	±0.3	±0.8	±1.5
	120~400	±0.2	±0.5	±1.2	±2.5
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4
	0~10	±1°		±1°30'	±3°
	10~50	±0°30'		±1°	±2°
	50~120	±0°20'		±0°30'	±1°
	120~400	±0°10'		±0°13'	±0°30'

SURFACE FINISH

Nr.	DWG. NO.	TITLE/ NAME	MAT'L	1	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30
TITLE			MODEL		
STDL OUTLINE DRAWING			STDL		
			DWG. NO.		
			STDL_OUT		
SCALE	SIZE	REV	SHEET		
N/S	A4	00	1/1		

MARK	DATE	REVISION	REVISER	APP .BY
1				
2				
3				

MODEL NO			STDL				
MATERIAL			HOUSING-ABS				
			LENS-AS				
			REFLECTOR-HEAT RESISTING ABS				
COLOR OF LENS			RED(), AMBER(), GREEN(), BLUE(),WHITE()				
FLASHING PER MIN.			60 ~ 80				
USE VOLT.	LED	CURRENT	DC12V		0.08W	MAX. 0.380A	LAYER1
			DC24V			MAX. 0.330A	LAYER1
			AC110V			MAX. 0.115A	LAYER1
			AC220V			MAX. 0.058A	LAYER1
KIND OF SOUND			WS	5 Warning Sounds			
			WM	5 Melodie			
			WA	5 Alarms			
			WV	5 Customizable sounds			
VOLUME			MAX. 105dB at 1m				
PROTECTION GRADE			WATER & DUST PROOF IP54				
CABLE ENTRY			ø8 LEAD HOLE				
COLOR OF HOUSING			MAKER STANDARD				
ACTION			LED STEADY/FLASHING LIGHT				

A4(297X210)