


MARK	DATE	REVISION	REVISER	APP. BY
①				
②				
③				

MODEL NO			SESA			
MATERIAL			HOUSING-AL			
			LENS-TEMPERED CLASS			
			REFLECTOR-PC			
COLOR OF LENS			RED(), AMBER(), GREEN(), BLUE()			
REV. PER MIN.			120 ~ 140			
USE VOLT.	BULB	CURRENT	DC24V	15W	1.788A	
			AC120V		0.422A	
			AC230V		0.211A	
VOLUME			MAX. 118dB			
PROTECTION GRADE			WATER & DUST PROOF IP66			
CABLE ENTRY			1/2" NPT			
COLOR OF HOUSING			MUNSELL NO. 7.5BG 7/2			
ACTION			BULB REVOLVING WARNING LIGHT			

※ Voltage AC120V: AC110V-120V, AC230V: AC220V-230V

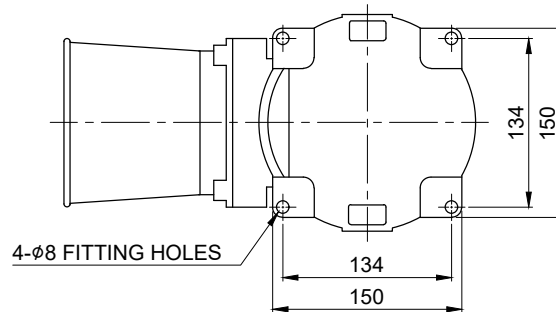

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH		-		-		1	-
FOR LINEAR DIMENSIONS	0.5~3	±0.05	±0.1	±0.2	-	SURFACE FINISH		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	3~6	±0.05	±0.1	±0.3	±0.5			DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	6~30	±0.1	±0.2	±0.5	±1			S.H.KIM	J.H.PARK		J.K.HAN	3	2019.03.20
	30~120	±0.15	±0.3	±0.8	±1.5			TITLE		SESA		MODEL	
	120~400	±0.2	±0.5	±1.2	±2.5			SESA		OUTLINE DRAWING		SESA	
	400~1000	±0.3	±0.8	±2	±4			Qlight		DWG. NO.		SESA_OUT	
FOR ANGULAR DIMENSIONS	0~10	±1°	±1°30'	±3°		SURFACE FINISH		SCALE		SIZE		REV	
	10~50	±0°30'	±1°	±2°				N/S		A4		00	
	50~120	±0°20'	±0°30'	±1°								SHEET	
	120~400	±0°10'	±0°13'	±0°30'								1/1	

A4(297X210)