




ST80LF-W□  
ST80L-W□

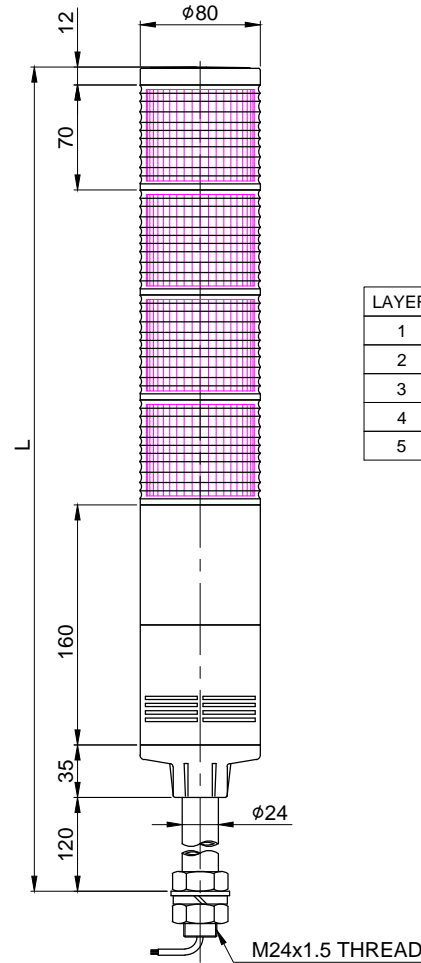

LAYER	L
1	397
2	467
3	537
4	607
5	677

MARK	DATE	REVISION	REVISER	APP.BY
1				
2				
3				

MODEL NO			ST80L-W			
MATERIAL			HOUSING-ABS			
			LENS-AS			
			POLE-AL			
COLOR OF LENS			RED(    ), AMBER(    ), GREEN(    ), BLUE(    ), WHITE(    )			
FLASHING PER MIN.			60 ~ 80			
USE VOLT.	LED	CURRENT	DC12V	0.08W	MAX. 0.176A	LAYER1
			DC24V		MAX. 0.111A	LAYER1
			AC110V		MAX. 0.082A	LAYER1
			AC220V		MAX. 0.057A	LAYER1
KIND OF SOUND			WS	5 Pre-Recorded Warning Sounds		
			WM	5 Pre-Recorded Melodies		
			WA	5 Pre-Recorded Alarms		
VOLUME			MAX. 85dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP23			
CABLE ENTRY			ø8 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			LED STEADY/ FLASHING TOWER LAMP			

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-	
FOR LINEAR DIMENSIONS		f	m	⌀	v		Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-	DSND BY S.H.KIM	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2016.08.30		
	3~6			±0.3	±0.5								
	6~30	±0.1	±0.2	±0.5	±1								
	30~120	±0.15	±0.3	±0.8	±1.5								
	120~400	±0.2	±0.5	±1.2	±2.5								
400~1000	±0.3	±0.8	±2	±4									
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°				DWG. NO.		ST80L-W_OUT		
	10~50	±0°30'		±1°	±2°				SCALE N/S		SIZE A4	REV 00	SHEET 1/1
	50~120	±0°20'		±0°30'	±1°								
	120~400	±0°10'		±0°13'	±0°30'								

Qlight

A4(297X210)