

Ø56mm USB LED Tower Lights


ST56(M)EL-USB



Connected to PC USB port without power supply unit

ST56EL-USB Ø56mm Pole Mount USB LED Tower Light


Model number	Layers	Certificates	Color
ST56EL-USB-BZ	5 Buzzer sounds	CE	1 layer: R
ST56EL-USB-WS	5 Warning sounds		2 layers: R G
ST56EL-USB-WM	5 Melodies		3 layers: R A G
ST56EL-USB-WA	5 Alarms		4 layers: R A G B
			5 layers: R A G B W



ST56(M)EL-USB Series

Technical Diagram

Units : mm

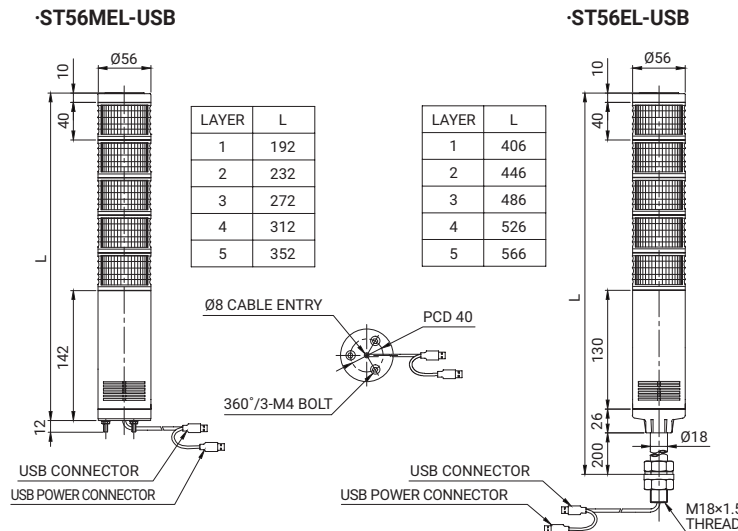

ST56MEL-USB Ø56mm Direct Mount USB LED Tower Light

Model number	Layers	Certificates	Color
ST56MEL-USB-BZ	5 Buzzer sounds	CE	1 layer: R
ST56MEL-USB-WS	5 Warning sounds		2 layers: R G
ST56MEL-USB-WM	5 Melodies		3 layers: R A G
ST56MEL-USB-WA	5 Alarms		4 layers: R A G B
			5 layers: R A G B W

Mounting bracket

Standard	LB18	LW18	QZ18	SZ18	QL18	SL18
Steel	Steel	ABS	ABS	Al	ABS	Al

※ Please refer to [Tower Light Mounting bracket] on this catalogue for detailed dimensions


Ordering Specifications

ST56EL-USB-WS	-	3	-	RAG	-	QL18
[Model number]		[Layers]		[Color]		[Bracket]
ST56EL-USB-BZ		1-1 Layers		R-Red		None-Standard
ST56EL-USB-WS		2-2 Layers		A-Amber		Bracket
ST56EL-USB-WM		3-3 Layers		G-Green		-LB18 -LW18
ST56EL-USB-WA		4-4 Layers		B-Blue		-QZ18 -SZ18
ST56MEL-USB-BZ		5-5 Layers		W-White		-QL18 -SL18
ST56MEL-USB-WS						
ST56MEL-USB-WM						
ST56MEL-USB-WA						

※ Mount brackets are available for the pole mount type(ST56EL-USB series) only.

Wiring Instructions

- Connect both USB connector and USB power connector to PC



Customization

- Customized color arrangement available
- Customized pole length available
- 70mm lens height(Standard: 40mm)
- Wall mount bracket

