

S100 Series



S100UA - Enhanced diffusion through a special 12 sided diffusive lens



S100U



S100UA

S100U / S100UA Bulb Revolving Warning Light



Model number	Voltage	Current	Bulb			Certificates	Weight	Color
			Spec	Standard	Parts no			
S100U S100UA	DC12V	0.966A	12V10W	T16x35 15S	9	CE	0.36kg	● R-Red
	DC24V	0.566A	24V10W	T16x35 15S	10		0.36kg	● A-Amber
	AC110V	0.130A	12V10W	T16x35 15S	9		0.59kg	● G-Green
	AC220V	0.065A	12V10W	T16x35 15S	9		0.59kg	● B-Blue

· Protection rating: IP44



Technical Diagram

Units: mm

S100U

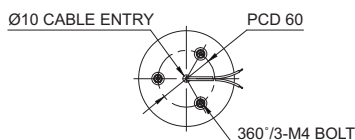

S100UA

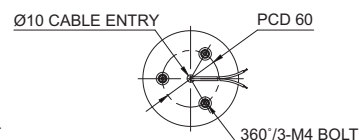

Wiring Instructions

- External Power line - UL1015 AWG18(0.75sq) x 2C 400mm
- DC Type: Black output line is negative(-)
- AC compatible type shall be connected the black and white wires when using AC110V, and the black and red wires when using AC220V.

Customization

- 2 buzzer sound types: Both prolonged(beep, beep) and staccato(beep, beep, beep) buzzer output available
- AC compatible type: Could select AC110V or AC220V by connecting 2 Power lines of 3 wires each.

Product used dome type lens
(Model number: S100UR)

Wall mount bracket options: Bracket structure allows for threading through the bracket hole or into the wall mount



S100UR



Wall Mount Bracket
SWP125



Wall Mount Bracket
SWM125

Ordering Specification

S100U	-	BZ	-	220	-	R
[Model number]		[Buzzer option]		[Voltage]		[Color]
S100U		(None)		12-DC12V		● R-Red
S100UA		- No buzzer		24-DC24V		● A-Amber
		BZ		110-AC110V		● G-Green
		- Built-in buzzer		220-AC220V		● B-Blue