




MARK	DATE	REVISION	REVISER	APP.BY
①				
②				
③				

MODEL NO		S60ADH		
MATERIAL		HOUSING-ABS		
		COVER-ABS		
USE VOLT.	CURRENT	DC12V	MAX. 0.083A	
		DC24V	MAX. 0.042A	
		AC110V	MAX. 0.016A	
		AC220V	MAX. 0.008A	
VOLUME		MAX. 100dB at 1m		
PROTECTION GRADE		WATER & DUST PROOF IP54		
CABLE ENTRY		10 X 10		
COLOR OF HOUSING		MAKER STANDARD		

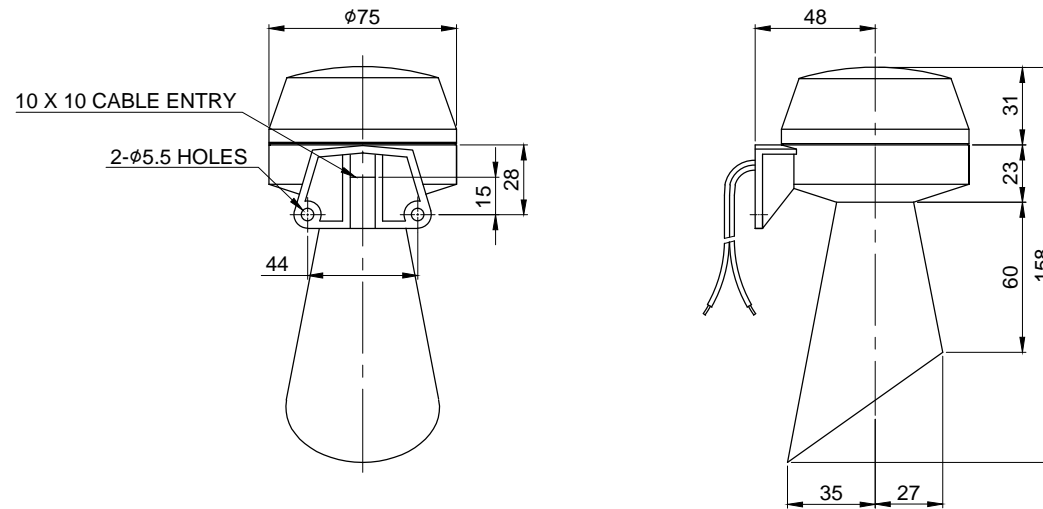

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓒ	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-	DSND BY S.H.KIM	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2016.08.30	
	3~6			±0.3	±0.5							
	6~30	±0.1	±0.2	±0.5	±1	TITLE S60ADH OUTLINE DRAWING 	MODEL S60ADH					
	30~120	±0.15	±0.3	±0.8	±1.5							
	120~400	±0.2	±0.5	±1.2	±2.5							
	400~1000	±0.3	±0.8	±2	±4							
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°	DWG. NO. S60ADH_OUT						
	10~50	±0°30'		±1°	±2°	SCALE N/S						
	50~120	±0°20'		±0°30'	±1°	SIZE A4						
	120~400	±0°10'		±0°13'	±0°30'	REV 00						
						SHEET 1/1						

Qlight

A4(297X210)