

1 2 3 4 5 6

A

B

C

D

A


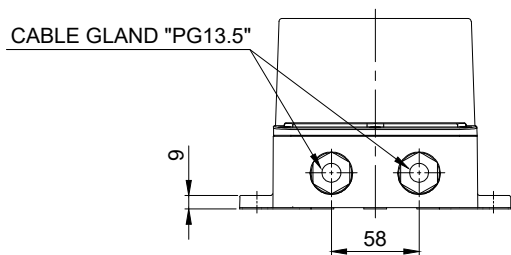
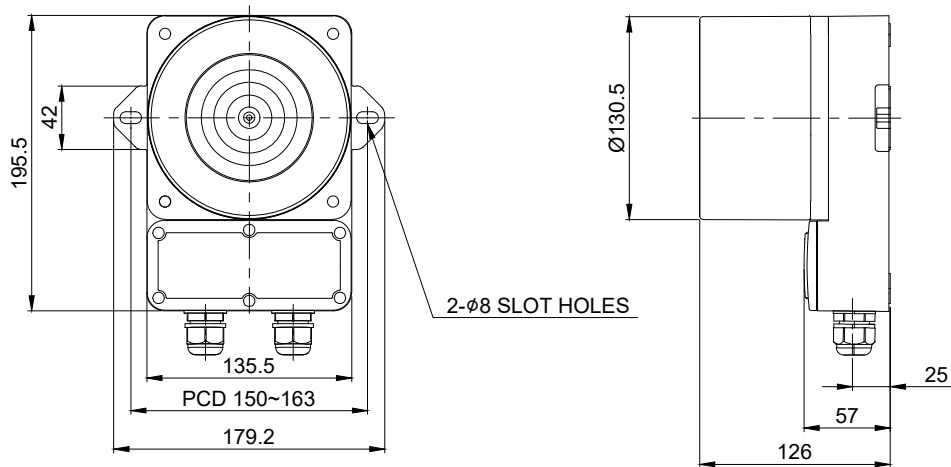
B



C

D

MARK	DATE	REVISION	REVISER	APP.BY
①				
②				
③				

MODEL NO		QWH35-TI	
MATERIAL		HORN-PC	
		HOUSING-PC+ABS	
		-	
USE VOLT.	CURRENT	DC12V ~ 24V	MAX. 0.970A
		AC110V ~ 220V	MAX. 0.320A
CHANNEL		BINARY INPUT	31CH
KIND OF SOUND	VOLUME	WARNING SOUNDS 31Ch	MAX. 115dB at 1m
PROTECTION GRADE		WATER & DUST PROOF - IP66	
CABLE ENTRY		CABLE GLAND "PG13.5" x 2	
COLOR OF HOUSING		MAKER STANDARD	



ISO2768-1 : CLASS OF TOLERANCE						-						
FOR LINEAR DIMENSIONS		f	m	Ⓒ	v	Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-	DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
	3~6			±0.3	±0.5							
	6~30	±0.1	±0.2	±0.5	±1	C.S.GWAK	J.H.PARK		J.K.HAN	3	2021.10.08	
	30~120	±0.15	±0.3	±0.8	±1.5	TITLE			MODEL			
	120~400	±0.2	±0.5	±1.2	±2.5	QWH35-TI OUTLINE DRAWING			QWH35-TI			
400~1000	±0.3	±0.8	±2	±4				DWG. NO.				
			QWH35-TI_OUT									
			SCALE									
			1/1									
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°				SIZE	REV	SHEET	
	10~50	±0°30'		±1°	±2°				A4	00	1/1	
	50~120	±0°20'		±0°30'	±1°							
	120~400	±0°10'		±0°13'	±0°30'							

1 2 3 4 5 6 A4(297X210)