


QAT80L : DC
QAT80L-BZ : DC
QAT80LF : DC
QAT80LF-BZ : DC

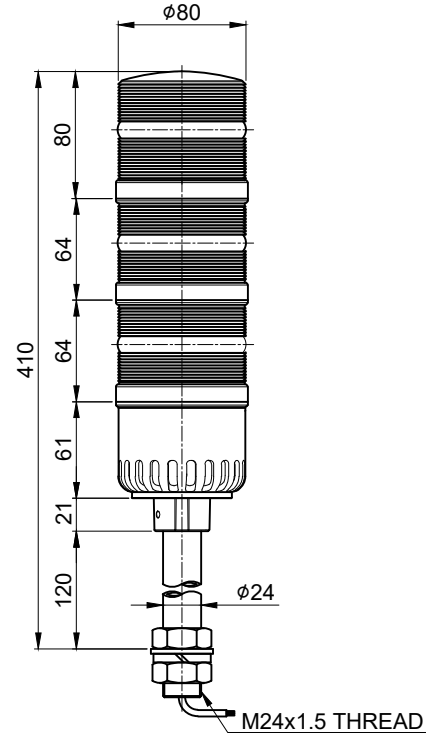

MARK	DATE	REVISION	REVISER	APP. BY
1				
2				
3				

MODEL NO		QAT80L/ L-BZ/ QAT80LF/ LF-BZ			
MATERIAL		HOUSING-PA66			
		LENS-PC			
		PIPE-AL			
COLOR OF LENS		RED(), AMBER(), GREEN()			
FLASHES. PER MIN		60 ~ 80			
USE VOLT.	LED	CURRNET	DC12V ~ DC24V	0.1W	MAX. 0.600A
VOLUME		MAX. 95dB at 1m			
PROTECTION GRADE		WATER & DUST PROOF IP65			
CABLE ENTRY		φ14 LEAD HOLE			
COLOR OF HOUSING		MAKER STANDARD			
ACTION		LED STEADY / FLASHING LIGHT			

ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS	0.5~3	f	m	⊙	v
	3~6	±0.05	±0.1	±0.2	-
	6~30	±0.1	±0.2	±0.3	±0.5
	30~120	±0.15	±0.3	±0.5	±1
	120~400	±0.2	±0.5	±0.8	±1.5
	400~1000	±0.3	±0.8	±1.2	±2.5
FOR ANGULAR DIMENSIONS	0~10	±1°	±1°30'	±2°	±4
	10~50	±1°	±1°30'	±1°	±2°
	50~120	±0°30'	±1°	±1°	±1°
	120~400	±0°20'	±0°30'	±1°	±1°
	120~400	±0°10'	±0°13'	±0°30'	±0°30'

SURFACE FINISH		-	-	-	-	1	-
		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QT'Y	REFERENCE
		DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
		K.H.PARK	J.Y.KIM		J.I.BAE	3	2023. 11. 7.
		TITLE			MODEL		
		QAT80(M)L OUTLINE DRAWING			QAT80L		
					DWG. NO.		
					QAT80(M)L_OUT		
		SCALE		SIZE	REV	SHEET	
		N/S		A4	00	1/1	

Qlight