
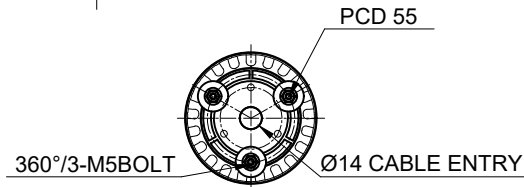


QAT80ML : DC  
QAT80ML-BZ : DC  
QAT80MLF : DC  
QAT80MLF-BZ : DC

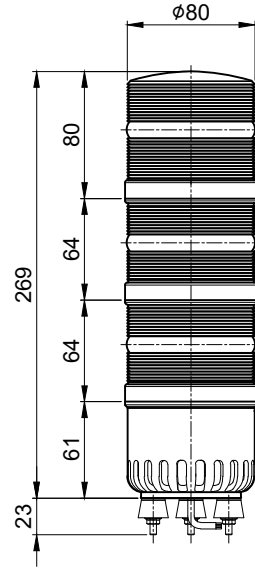

MARK	DATE	REVISION	REVISER	APP.BY
1				
2				
3				

MODEL NO		QAT80ML/ ML-BZ/ QAT80MLF/ MLF-BZ			
MATERIAL		HOUSING-PA66			
		LENS-PC			
COLOR OF LENS		RED( ), AMBER( ), GREEN( )			
FLASHES. PER MIN		60 ~ 80			
USE VOLT.	LED	CURRNET	DC12V ~ DC24V	0.1W	MAX. 0.600A
VOLUME		MAX. 95dB at 1m			
PROTECTION GRADE		WATER & DUST PROOF IP65			
CABLE ENTRY		Ø14 LEAD HOLE			
COLOR OF HOUSING		MAKER STANDARD			
ACTION		LED STEADY / FLASHING LIGHT			

ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS	0.5~3	f	m	Ⓢ	v
	3~6	±0.05	±0.1	±0.2	-
	6~30	±0.1	±0.2	±0.3	±0.5
	30~120	±0.15	±0.3	±0.5	±1
	120~400	±0.2	±0.5	±0.8	±1.5
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±1.2	±2.5
	0~10	±1°	±1°30'	±2	±4
	10~50	±0°30'	±1°	±1°30'	±3°
	50~120	±0°20'	±1°	±1°	±2°
	120~400	±0°10'	±1°	±0°30'	±1°

SURFACE FINISH		-	-	-	1	-
		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QT'Y
		DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW
		K.H.PARK	J.Y.KIM		J.I.BAE	3
		DATE			REFERENCE	
		2023. 11. 7.				
		TITLE			MODEL	
		QAT80(M)L OUTLINE DRAWING			QAT80L	
		DWG. NO.			QAT80(M)L_OUT	
		SCALE	SIZE	REV	SHEET	
		N/S	A4	00	1/1	

**Qlight**