





CABLE ENTRY 1/2" NPT

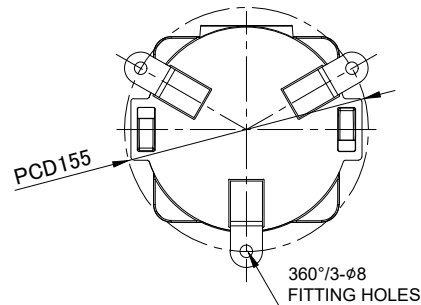

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	c	v		Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY
	0.5~3	±0.05	±0.1	±0.2	-	DSND BY J.H.PARK	CHKD BY 	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2021.07.28	
	3~6			±0.3	±0.5							
	6~30	±0.1	±0.2	±0.5	±1	TITLE QNE-CR OUTLINE DRAWING		MODEL QNE-CR				
	30~120	±0.15	±0.3	±0.8	±1.5							
	120~400	±0.2	±0.5	±1.2	±2.5							
400~1000	±0.3	±0.8	±2	±4			DWG. NO. QNE-CR_OUT					
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'					±3°			
	10~50	±0°30'		±1°					±2°			
	50~120	±0°20'		±0°30'					±1°			
	120~400	±0°10'		±0°13'					±0°30'			
						SCALE 1/1		SIZE A4	REV 00	SHEET 1/1		

MARK	DATE	REVISION	REVISER	APP. BY
1				
2				
3				

MODEL NO			QNE-CR			
MATERIAL			HOUSING-AL			
			INNER LENS-TEMPERED GLASS			
			PROTECTION CAGE-SUS316L			
COLOR OF LENS			RED(), AMBER(), GREEN(), BLUE()			
FLASHES. PER MIN.			60~80			
STROBE FLASHES. PER MIN.			70~80			
REV. PER MIN.			120~140 RPM			
USE VOLT.	LED	CURRENT	DC12~24V	0.2W	MAX. 0.558A	
			AC110~230V		MAX. 0.136A	
PROTECTION GRADE			WATER & DUST PROOF IP66			
CABLE ENTRY			1/2" NPT			
COLOR OF HOUSING			RED or MUNSELL NO.7.5BG 7/2			
ACTION			LED STEADY / FLASHING / STROBE / ROTATE			