




MARK	DATE	REVISION	REVISER	APP.BY
①				
②				
③				

MODEL NO		ET50MCL	
MATERIAL		HOUSING-PA	
		LENS-PC	
		BRACKET-PA	
COLOR OF LENS		3 COLORS	
USE VOLT.	CURRENT	DC24V	0.053A
VOLUME		MAX. 85dB at 1m (BUZZER TYPE)	
PROTECTION GRADE		WATER & DUST PROOF IP20	
		WATER & DUST PROOF IP20 (BUZZER TYPE)	
CABLE ENTRY		ø8.5 LEAD HOLE	
COLOR OF HOUSING		MAKER STANDARD	
ACTION		LED STEADY LIGHT	

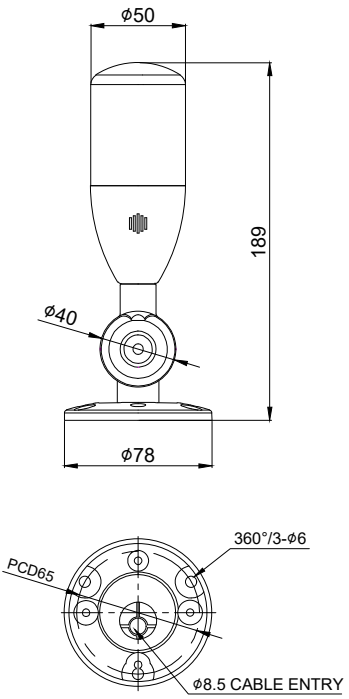

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH																		
FOR LINEAR DIMENSIONS	0.5~3	f	m	Ⓒ	v		Nr.	DWG. NO.	TITLE/ NAME			MAT'L	QTY	REFERENCE										
	3~6	±0.05	±0.1	±0.2	-		DSND BY		CHKD BY		CHKD BY	APRV BY	VIEW	DATE										
	6~30	±0.1	±0.2	±0.5	±1		J.K.HAN		J.H.PARK			J.I.BAE	3	2022.9.20										
	30~120	±0.15	±0.3	±0.8	±1.5		TITLE ET50MCL OUTLINE DRAWING									MODEL ET50MCL								
	120~400	±0.2	±0.5	±1.2	±2.5																			
	400~1000	±0.3	±0.8	±2	±4																			
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°										DWG. NO. ET50MCL_OUT									
	10~50	±0°30'		±1°	±2°																			
	50~120	±0°20'		±0°30'	±1°										SCALE N/S				SIZE A4		REV 00		SHEET 1/1	
	120~400	±0°10'		±0°13'	±0°30'																			

