




MARK	DATE	REVISION	REVISER	APP. BY
①				
②				
③				

MODEL NO		ETA50L	
MATERIAL		HOUSING-AL	
		LENS-PC	
		BRACKET-AL	
COLOR OF LENS		RED(), AMBER(), GREEN()	
USE VOLT.	CURRENT	DC24V	0.070A
VOLUME		MAX. 85dB at 1m (BUZZER TYPE)	
PROTECTION GRADE		WATER & DUST PROOF IP20	
		WATER & DUST PROOF IP20 (BUZZER TYPE)	
CABLE ENTRY		ø17 LEAD HOLE	
COLOR OF HOUSING		MAKER STANDARD	
ACTION		LED STEADY LIGHT / FLASHING LIGHT	

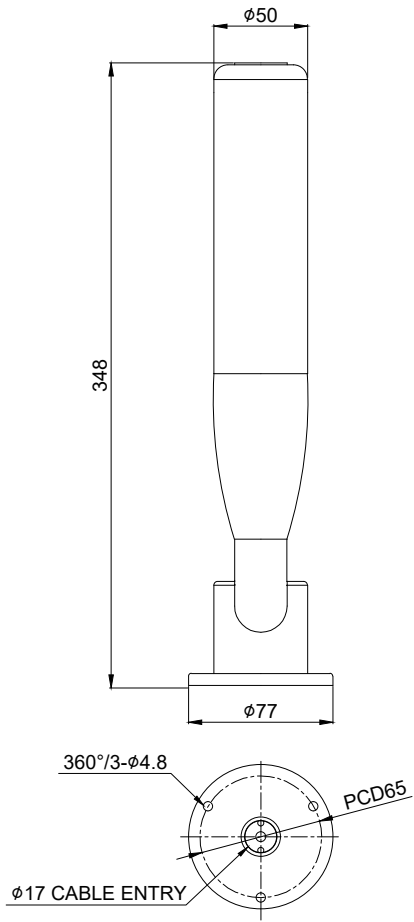

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH											
FOR LINEAR DIMENSIONS	0.5~3	f	m	Ⓒ	v		Nr.	DWG. NO.	TITLE/ NAME			MAT'L	QT'Y	REFERENCE			
	3~6	±0.05	±0.1	±0.2	-		DSND BY J.K.HAN	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.I.BAE	VIEW 3	DATE 2022.9.20					
	6~30			±0.3	±0.5												
	30~120	±0.1	±0.2	±0.5	±1												
	120~400	±0.15	±0.3	±0.8	±1.5												
	400~1000	±0.2	±0.5	±1.2	±2.5												
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4		TITLE ETA50L OUTLINE DRAWING			MODEL ETA50L							
	0~10	±1°		±1°30'						DWG. NO. ETA50L_OUT							
	10~50	±0°30'		±1°						SCALE N/S		SIZE A4		REV 00		SHEET 1/1	
	50~120	±0°20'		±0°30'						±1°							
	120~400	±0°10'		±0°13'		±0°30'											