


MARK	DATE	REVISION	REVISER	APP .BY
1				
2				
3				

MODEL NO	EMCL70
MATERIAL	HOUSING-AL LENS-PC
COLOR OF LENS	3 COLORS
USE VOLT.	DC24V
VOLUME	MAX. 85dB at 1m (BUZZER TYPE)
PROTECTION GRADE	WATER & DUST PROOF IP69K(Buzzer Type IP20)
CABLE ENTRY	M12 CONNECTOR
COLOR OF HOUSING	MAKER STANDARD
ACTION	LED STEADY

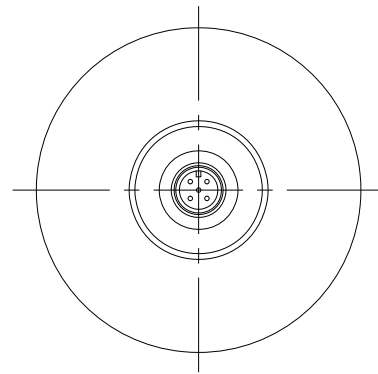

ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS	0.5~3	f ±0.05	m ±0.1	Ⓢ ±0.2	v -
	3~6			±0.3	±0.5
	6~30	±0.1	±0.2	±0.5	±1
	30~120	±0.15	±0.3	±0.8	±1.5
	120~400	±0.2	±0.5	±1.2	±2.5
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4
	0~10	±1°		±1°30'	±3°
	10~50	±0°30'		±1°	±2°
	50~120	±0°20'		±0°30'	±1°
	120~400	±0°10'		±0°13'	±0°30'

SURFACE
FINISH

Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QT'Y	REFERENCE
DSND BY J.K.HAN	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.I.BAE	VIEW 3	DATE 2022.9.20
TITLE EMCL70 OUTLINE DRAWING			MODEL EMCL70		
			DWG. NO. EMCL70_OUT		
			SCALE N/S	SIZE A4	REV 00 SHEET 1/1