
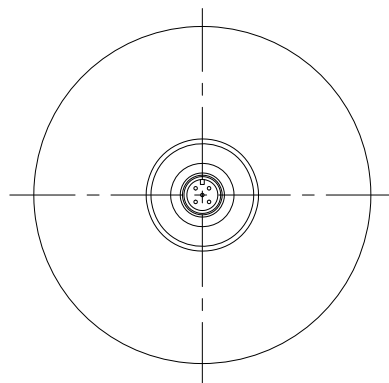



MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO	EMCL90
MATERIAL	HOUSING-AL
	LENS-PC
COLOR OF LENS	3 COLORS
USE VOLT.	DC24V
VOLUME	MAX. 85dB at 1m (BUZZER TYPE)
PROTECTION GRADE	WATER & DUST PROOF IP69K(Buzzer Type IP20)
CABLE ENTRY	M12 CONNECTOR
COLOR OF HOUSING	MAKER STANDARD
ACTION	LED STEADY



ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS	0.5~3	f ±0.05	m ±0.1	⌀ ±0.2	v -
	3~6			±0.3	±0.5
	6~30	±0.1	±0.2	±0.5	±1
	30~120	±0.15	±0.3	±0.8	±1.5
	120~400	±0.2	±0.5	±1.2	±2.5
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4
	0~10	±1°		±1°30'	±3°
	10~50	±0°30'		±1°	±2°
	50~120	±0°20'		±0°30'	±1°
	120~400	±0°10'		±0°13'	±0°30'

SURFACE FINISH							
	Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QT'Y	REFERENCE
	DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
	J.K.HAN	J.H.PARK		J.I.BAE	3	2022.9.20	
	TITLE EMCL90 OUTLINE DRAWING				MODEL EMCL90		
					DWG. NO. EMCL90_OUT		
	SCALE N/S		SIZE A4		REV 00		SHEET 1/1