

EPL


## PRODUCT SPECIFICATION

EPL

**Materials** Housing-Al, Lens-PC**Ambient operating temperature** -25°C to +55°C**Protection rating** IP54



- Economical lighting with excellent vibration resistance and heat dissipation
- Low power consumption and long life by using high-efficiency LED
- Among body lengths of 380/550mm, select a suitable specification according to the lighting range and installation space

### EPL LED Work Lights

Optics Specifications			
Model number	EPL380		EPL550
Lens Color	Translucent		
Light color	Cooldaylight		
Directions	6,000-6,500K		
Luminous flux	DC	1,000lm	1,500lm
Efficacy(lm/W)	DC	300Lux	500Lux
Specifications			
Model number	EPL380		EPL550
Voltage	DC24V		
Range for operation voltage	DC24V		
Power consumption	DC24V	10W	15W
Insulation resistance	Min. 100MΩ(500V DC mega ohm meter)		
Withstanding voltage	DC: 500VAC, 60Hz, 1 minute/AC: 1,500VAC, 60Hz, 1 minute		
Operating temperature	-25°C to +55°C		
Protection rating	IP54		
Materials	Housing-Al, Lens-PC		
Certification			
Weight(Approx.)	0.27kg		0.40kg


※ CE compliant : DC24V

### Structural features

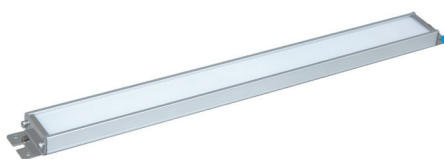

### Technical Diagram

Units: mm

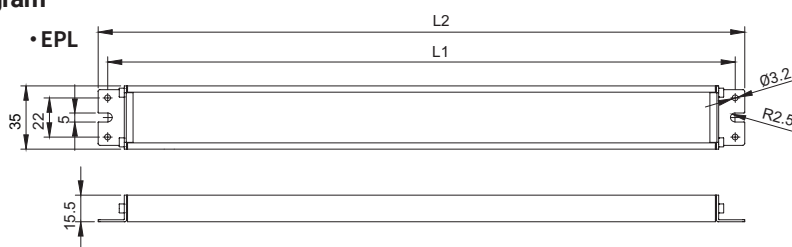

Model	L1	L2
EPL380	380	391
EPL550	545	556

### Ordering Specification

EPL	-	380	-	24
[Model number]		[Product length]		[Voltage]
EPL		380-391mm 545-556mm		24-DC24V