




EARTH GROUND-M4  
OUT




BRACKET (PC)

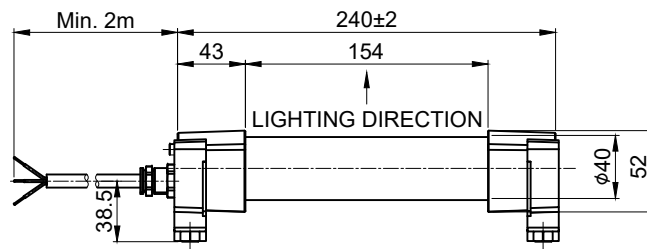

BRACKET INSTALLATION



BRACKET (PC)

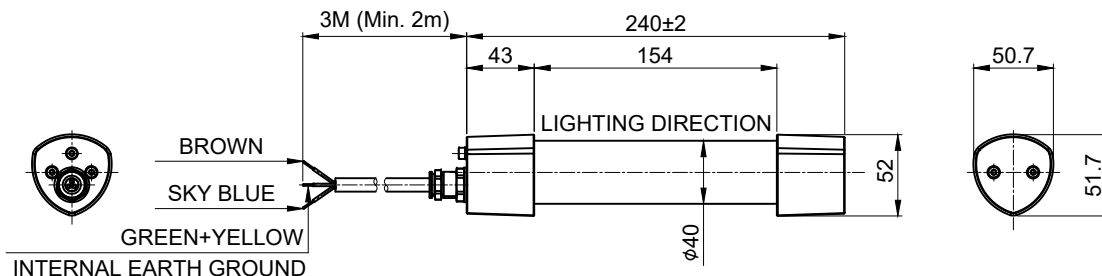



QLEX-TRI-240(PL) PRODUCT LAY-OUT

1. POWER CABLE  
- VCTF-AWG18(0.75sq)-3C-2M

ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS		f	m	⊙	v
	0.5~3	±0.05	±0.1	±0.2	-
	3~6			±0.3	±0.5
	6~30	±0.1	±0.2	±0.5	±1
	30~120	±0.15	±0.3	±0.8	±1.5
	120~400	±0.2	±0.5	±1.2	±2.5
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4
	0~10	±1°		±1°30'	±3°
	10~50	±0°30'		±1°	±2°
	50~120	±0°20'		±0°30'	±1°
	120~400	±0°10'		±0°13'	±0°30'

SURFACE  
FINISH

-	-	-	-	1	-	
Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
J.Y. KIM	H.M. SEO		J.W. KIM	3	2022.09.30	
TITLE			MODEL			
QLEX-TRI-240(PL) LAYOUT			QLEX-TRI SERISE			
			DWG. NO.			
			QLEX -TRI-240(PL)-OUT			
			SCALE	SIZE	REV	SHEET
			N/S	A4	00	1/1

MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO		QLEX-TRI-240(PL)	
MATERIAL		HOUSING ( SIDE COVER CG ) - ALDC12.1	
		HOUSING ( SIDE COVER ) - ALDC12.1	
		LENS ( GLOBE ) - PC	
COLOR OF LENS		TRANSLUCENT	
USE VOLT.	CURRENT	DC24V	MAX. 0.37A
PROTECTION GRADE		Ex db IIC T6 Gb IP66/IP67	
CABLE ENTRY		M12 x P1.5	