
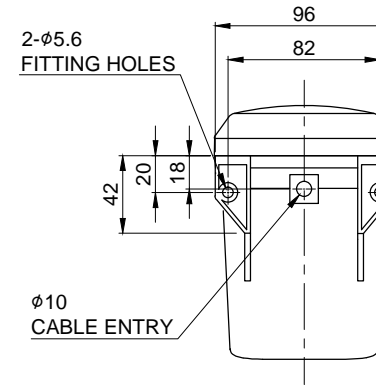
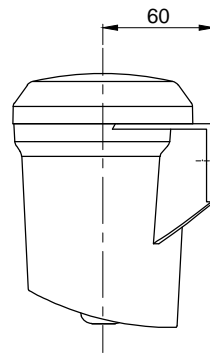


MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO		QAP100H-N	
MATERIAL		HOUSING-ABS	
		RESONANCE CHAMBER-ABS	
		-	
COLOR OF HOUSING		MAKER STANDARD	
USE VOLT.	CURRNET	DC12V ~ 24V	MAX. 1.050A
		AC110V ~ 220V	MAX. 0.160A
KIND OF SOUND	VOLUME	WARNING SOUNDS 30Ch	MAX. 100dB at 1m
PROTECTION GRADE		WATER & DUST PROOF - IP65	
CABLE ENTRY		ø10 CABLE ENTRY	

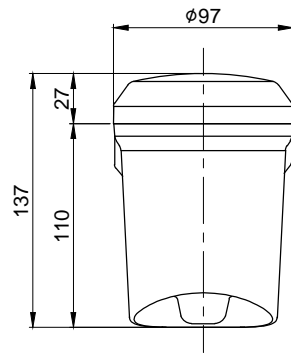

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH		-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	(C)	v			Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-			DSND BY	CHKD BY		APRV BY	VIEW	DATE
	3~6			±0.3	±0.5			H.M.SEO	J.Y.KIM		J.W.KIM	3	2022.12.23
	6~30	±0.1	±0.2	±0.5	±1								
	30~120	±0.15	±0.3	±0.8	±1.5								
	120~400	±0.2	±0.5	±1.2	±2.5								
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4			TITLE QAP100H-N OUTLINE DRAWING			MODEL QAP100H-N		
	0~10	±1°		±1°30'	±3°						DWG. NO. QAP100H-N_OUT		
	10~50	±0°30'		±1°	±2°								
	50~120	±0°20'		±0°30'	±1°						SCALE N/S	SIZE A4	REV 00
	120~400	±0°10'		±0°13'	±0°30'								SHEET 1/1

A4(297X210)