



MARK	DATE	REVISION	REVISER	APP.BY
①				
②				
③				

MODEL NO		ETG50L	
MATERIAL		HOUSING-ABS	
		LENS-PC	
		BRACKET-ABS	
COLOR OF LENS		RED(), AMBER(), GREEN()	
USE VOLT.	CURRENT	DC24V	0.055A
VOLUME		MAX. 85dB at 1m (BUZZER TYPE)	
PROTECTION GRADE		WATER & DUST PROOF IP65	
		WATER & DUST PROOF IP54 (BUZZER TYPE)	
CABLE ENTRY		ø10 LEAD HOLE	
COLOR OF HOUSING		MAKER STANDARD	
ACTION		LED STEADY LIGHT / FLASHING LIGHT	

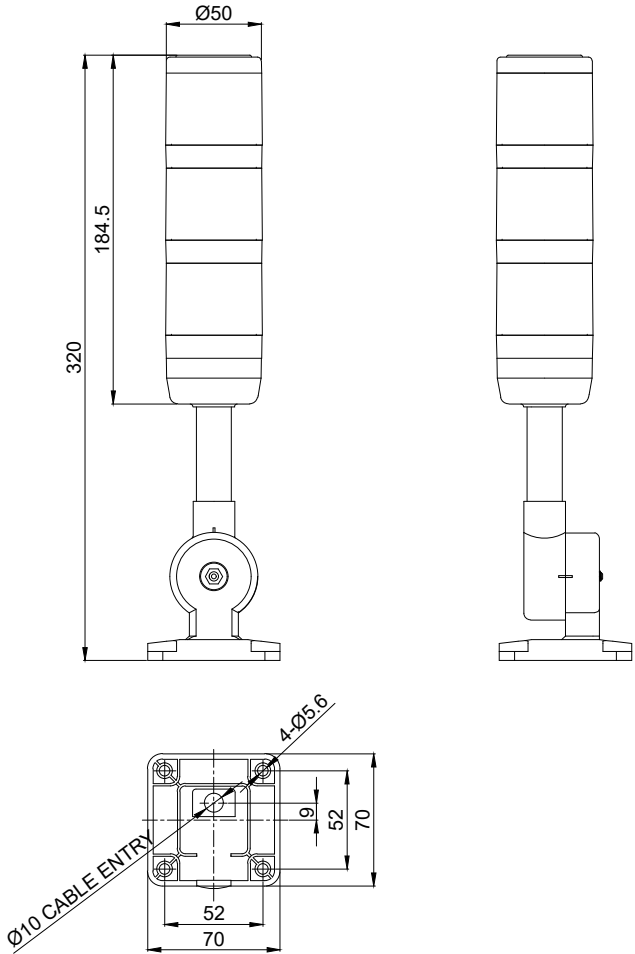

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH								
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v		Nr.	DWG. NO.	TITLE/ NAME			MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY		CHKD BY		CHKD BY	APRV BY	VIEW	DATE
	3~6			±0.3	±0.5		J.K.HAN		J.H.PARK			J.I.BAE	3	2022.10.14
	6~30	±0.1	±0.2	±0.5	±1									
	30~120	±0.15	±0.3	±0.8	±1.5									
	120~400	±0.2	±0.5	±1.2	±2.5									
400~1000	±0.3	±0.8	±2	±4										
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°				MODEL					
	10~50	±0°30'		±1°	±2°				ETG50L					
	50~120	±0°20'		±0°30'	±1°				DWG. NO.					
	120~400	±0°10'		±0°13'	±0°30'				ETG50L_OUT					
									SCALE					
						N/S		SIZE		REV		SHEET		
								A4		00		1/1		