


MARK	DATE	REVISION	REVISER	APP.BY
①				
②				
③				

MODEL NO		ETR50L	
MATERIAL		HOUSING-ABS	
		LENS-PC	
		BRACKET-ABS	
COLOR OF LENS		RED(    ), AMBER(    ), GREEN(    )	
USE VOLT.	CURRENT	DC24V	0.055A
VOLUME		MAX. 85dB at 1m (BUZZER TYPE)	
PROTECTION GRADE		WATER & DUST PROOF IP65	
		WATER & DUST PROOF IP54 (BUZZER TYPE)	
CABLE ENTRY		ø10 LEAD HOLE	
COLOR OF HOUSING		MAKER STANDARD	
ACTION		LED STEADY LIGHT / FLASHING LIGHT	

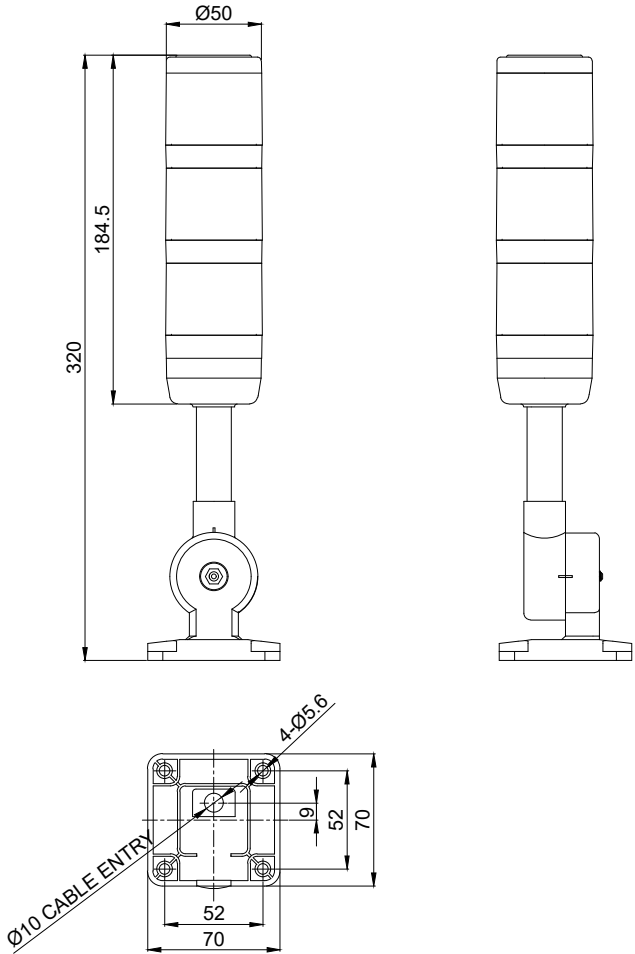

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH		Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY	REFERENCE	
FOR LINEAR DIMENSIONS	0.5~3	±0.05	±0.1	±0.2	-			DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE		
	3~6			±0.3	±0.5			J.K.HAN	J.H.PARK		J.I.BAE	3	2022.10.14		
	6~30	±0.1	±0.2	±0.5	±1			TITLE ETR50L OUTLINE DRAWING							MODEL ETR50L
	30~120	±0.15	±0.3	±0.8	±1.5			Qlight							ETR50L_OUT
	120~400	±0.2	±0.5	±1.2	±2.5										SCALE N/S
	400~1000	±0.3	±0.8	±2	±4										SIZE A4
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°	SURFACE FINISH									REV 00
	10~50	±0°30'		±1°	±2°										SHEET 1/1
	50~120	±0°20'		±0°30'	±1°										
	120~400	±0°10'		±0°13'	±0°30'										