



S125R

PRODUCT SPECIFICATION

S125R | S125U
S125M

Materials Lens-AS, Housing-ABS,
Reflector-Heat resistant ABS
Ambient operating temperature -20°C to +50°C
Volume Max.90dB at 1m
Protection rating IP44, IP54
Revolving speed 120-140RPM

- Ø125mm standard-sized bulb revolving warning lights
- Adopts a special Power transmission system that reduces noise and wear

S125R Bulb Revolving Warning Light


Model number	Voltage	Current	Bulb			Certificates	Weight	Color
			Spec	Standard	Parts no			
S125R	DC12V	0.966A	12V10W	T16x35 15S	9		0.40kg	● R-Red
	DC24V	0.566A	24V10W	T16x35 15S	10		0.40kg	● A-Amber
	AC110V	0.130A	12V10W	T16x35 15S	9		0.65kg	● G-Green
	AC220V	0.065A	12V10W	T16x35 15S	9		0.65kg	● B-Blue

- Protection rating: IP44
- ※ CE Compliant: DC12V, DC24V

Technical Diagram

Units: mm

·S125R

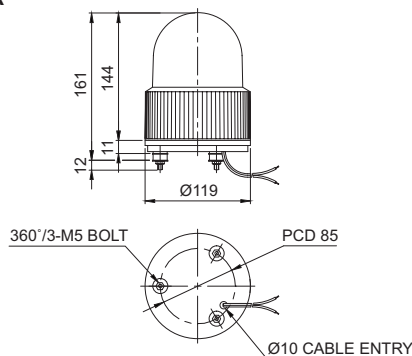

Wiring Instructions

- External Power line
UL1015 AWG18(0.75sq) x 2C 400mm
- DC Type: Black output line is negative(-)
- AC compatible type shall be connected the black and white wires when using AC110V, and the black and red wires when using AC220V.

Customization

- AC voltage switch built-in type: AC110V and AC220V can be selected with a built-in 110/220V switch.
- Wall mount bracket options: Bracket structure allows for threading through the bracket hole or into the wall mount



Wall Mount Bracket SWP125



Wall Mount Bracket SWM125

Ordering Specification

S125R	-	BZ	-	220	-	R
[Model number] S125R		[Buzzer option] (None) - No buzzer BZ - Built-in buzzer		[Voltage] 12-DC12V 24-DC24V 110-AC110V 220-AC220V		[Color] ● R-Red ● A-Amber ● G-Green ● B-Blue