
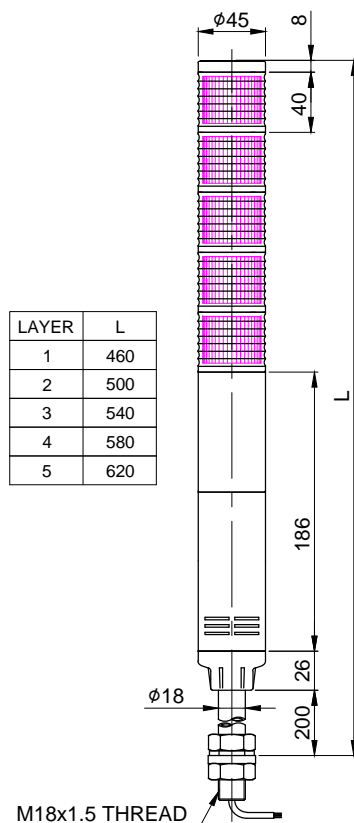


ST45L-W□ : DC
ST45LF-W□ : DC

ST45L-W□ : AC
ST45LF-W□ : AC

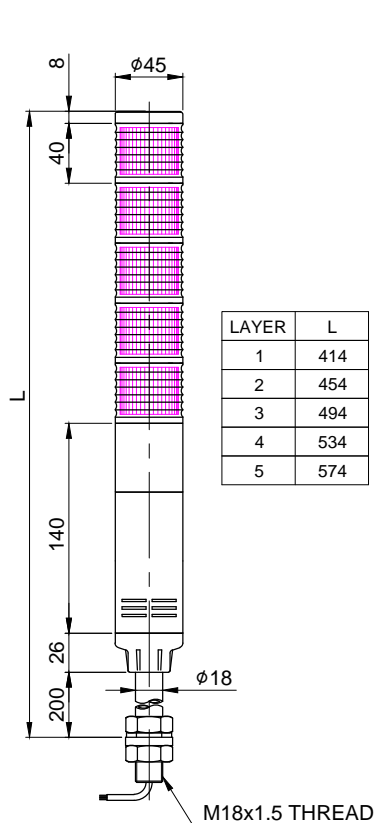

MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO			ST45L-W			
MATERIAL			HOUSING-ABS			
			LENS-AS			
			POLE-AL			
COLOR OF LENS			RED(), AMBER(), GREEN(), BLUE(), WHITE()			
FLASHING PER MIN.			60 ~ 80			
USE VOLT.	LED	CURRENT	DC12V	0.08W	MAX. 0.056A	LAYER1
			DC24V		MAX. 0.071A	LAYER1
			AC110V		MAX. 0.051A	LAYER1
			AC220V		MAX. 0.042A	LAYER1
KIND OF SOUND			WS	5 Pre-Recorded Warning Sounds		
			WM	5 Pre-Recorded Melodie		
			WA	5 Pre-Recorded Alarms		
VOLUME			MAX. 85dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP23			
CABLE ENTRY			ø8 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			LED STEADY/ FLASHING TOWER LAMP			

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH		-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	⌀	v			Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-			DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	3~6			±0.3	±0.5			S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30
	6~30	±0.1	±0.2	±0.5	±1			TITLE ST45L-W OUTLINE DRAWING					
	30~120	±0.15	±0.3	±0.8	±1.5			MODEL ST45L-W					
	120~400	±0.2	±0.5	±1.2	±2.5			DWG. NO. ST45L-W_OUT					
FOR ANGULAR DIMENSIONS	0~10	±1°	±1°30'	±3°				SCALE N/S SIZE A4 REV 00 SHEET 1/1					
	10~50	±0°30'	±1°	±2°									
	50~120	±0°20'	±0°30'	±1°									
	120~400	±0°10'	±0°13'	±0°30'									

Qlight

A4(297X210)