

# Ø125mm Bulb Revolving Warning Lights

## S125 Series



### S125U Bulb Revolving Warning Light

Model number	Voltage	Current	Bulb			Certificates	Weight	Color
			Spec	Standard	Parts no			
S125U	DC12V	0.966A	12V10W	T16x35 15S	9		0.41kg	● R-Red
	DC24V	0.566A	24V10W	T16x35 15S	10		0.41kg	● A-Amber
	AC110V	0.130A	12V10W	T16x35 15S	9		0.65kg	● G-Green
	AC220V	0.065A	12V10W	T16x35 15S	9		0.65kg	● B-Blue

· Protection rating: IP44

※ CE Compliant: DC12V, DC24V




S125U

### Technical Diagram

Units: mm

·S125U

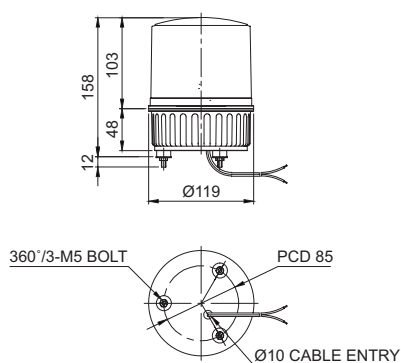

### Wiring Instructions

- External Power line - UL1015 AWG18(0.75sq) x 2C 400mm
- DC Type: Black output line is negative(-)
- AC compatible type shall be connected the black and white wires when using AC110V, and the black and red wires when using AC220V.

### Customization

- 2 buzzer sound types: Both prolonged (beep, beep) and staccato(beep, beep, beep) buzzer output available
- Wall mount bracket options: Bracket structure allows for threading through the bracket hole or into the wall mount
- AC voltage switch built-in type: AC110V and AC220V can be selected with a built-in 110/220V switch.



Wall Mount Bracket SWP125



Wall Mount Bracket SWM125

### Ordering Specification

S125U	-	BZ	-	220	-	R
[Model number]		[Buzzer option]		[Voltage]		[Color]
S125U		(None)		12-DC12V		● R-Red
		- No buzzer		24-DC24V		● A-Amber
		BZ		110-AC110V		● G-Green
		- Built-in buzzer		220-AC220V		● B-Blue