

1

2

3

4

5

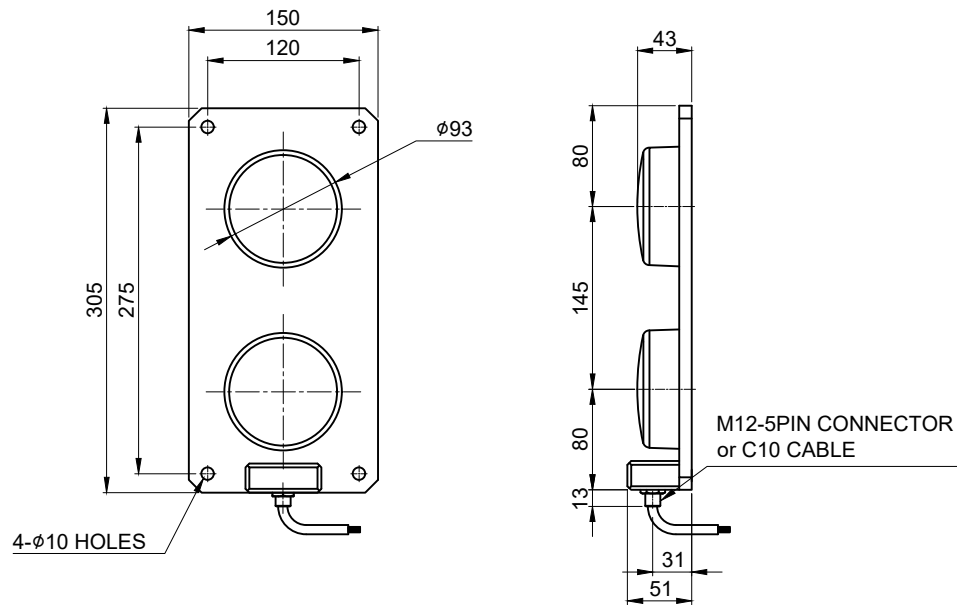
6

A

B

C

D



MARK	DATE	REVISION	REVISER	APP. BY
1				
2				
3				



MODEL NO			SSL200M			
MATERIAL			HOUSING-AL			
			LENS-PC			
COLOR OF LENS			RED, GREEN			
USE VOLT.	LED	CURRENT	DC24V	0.08W	0.302A	
			AC110V		0.080A	
			AC220V		0.080A	
PROTECTION GRADE			WATER & DUST PROOF IP68			
CONNECTOR			M12-5PIN or C10 CABLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			LED STEADY			

A

B

C

D

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v		Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY
	0.5~3	±0.05	±0.1	±0.2	-	DSND BY C.S.GWAK	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2021.08.30	
	3~6			±0.3	±0.5							
	6~30	±0.1	±0.2	±0.5	±1							
	30~120	±0.15	±0.3	±0.8	±1.5							
	120~400	±0.2	±0.5	±1.2	±2.5							
400~1000	±0.3	±0.8	±2	±4								
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°				DWG. NO. SSL200W_OUT			
	10~50	±0°30'		±1°	±2°							
	50~120	±0°20'		±0°30'	±1°				SCALE 1/1	SIZE A4	REV 01	SHEET 1/1
	120~400	±0°10'		±0°13'	±0°30'							

1

2

3

4

5

6

A4(297X210)