

# S125 Series



## PRODUCT SPECIFICATION

S125LR | S125MLR

**Materials** Lens-AS, Housing-ABS  
**Reflector**-Heat resistant ABS  
**Ambient operating temperature** -20°C to +50°C  
**Volume** Max.90dB at 1m  
**Protection rating** IP44, IP54  
**Revolving speed** 120-140RPM  
**Compliant with RoHS directive**

- Ø125mm standard LED revolving warning lights
- Excellent omni-directional visibility with LED light collecting system and special multifaceted reflector
- Can select between standard and built-in buzzer type depending on installation environment



S125LR

## S125LR LED Revolving Warning Lights


Model number	Voltage	Current	Certificates	Weight	Color
S125LR	DC12V	0.422A	-	0.43kg	● R-Red
	DC24V	0.266A		0.43kg	● A-Amber
	AC110V	0.082A		0.66kg	● G-Green
	AC220V	0.045A		0.66kg	● B-Blue

· Protection rating: IP44

## Technical Diagram

Units: mm

·S125LR

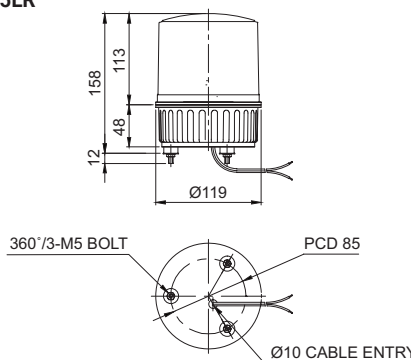

## Wiring Instructions

- External Power line  
UL1015 AWG18(0.75sq) x 2C 400mm
- DC Type  
: Black output line is negative(-)
- AC voltage switch built-in type:  
AC110V and AC220V can be selected with a built-in 110/220V switch.

## Customization

- 2 buzzer sound types: Both prolonged(beep, beep) and staccato(beep, beep, beep) buzzer output available

Same design with S125R  
(Model number: S125RLR)

Wall mount bracket options: Bracket structure allows for threading through the bracket hole or into the wall mount



S125RLR




Wall Mount Bracket  
SWP125



Wall Mount Bracket  
SWM125

## Ordering Specification

S125LR	-	BZ	-	220	-	R
[Model number]   S125LR		[Buzzer option]   (None) - No buzzer BZ - Built-in buzzer		[Voltage]   12-DC12V 24-DC24V 110-AC110V 220-AC220V		[Color]   ● R-Red ● A-Amber ● G-Green ● B-Blue



## Feature of LED revolving warning lights

LED revolving warning lights has Qlight's distinctive LED light collecting system and special multifaceted reflector allowing excellent omni-directional visibility