
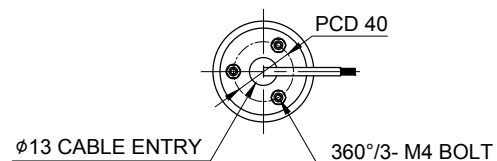



LAYER	L
1	98
2	154
3	210
4	266
5	322



MARK	DATE	REVISION	REVISER	APP.BY
1				
2				
3				

MODEL NO			QT70ML				
MATERIAL			HOUSING-PC				
			LENS-PC				
			COVER-PC				
COLOR OF LENS			RED(    ), AMBER(    ), GREEN(    ), BLUE(    ), WHITE(    )				
KIND OF FUNCTION			USE VOLT.	STEADY	FLASHES	STROBE	REVOLVING
LED MODULE	USE VOLT.	LAYER 1 CURRNET (MAX.)	DC12V	0.100A	0.100A	0.120A	0.080A
			DC24V	0.050A	0.050A	0.120A	0.080A
			AC110V	0.020A	0.020A	-	-
			AC220V	0.020A	0.020A	-	-
PROTECTION GRADE			WATER & DUST PROOF IP65				
CABLE ENTRY			ø8 LEAD HOLE				
COLOR OF HOUSING			MAKER STANDARD				
ACTION			LED TOWER LAMP				

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	⌀	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY S.H.KIM	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2019.03.20
	3~6			±0.3	±0.5							
	6~30	±0.1	±0.2	±0.5	±1							
	30~120	±0.15	±0.3	±0.8	±1.5							
	120~400	±0.2	±0.5	±1.2	±2.5							
400~1000	±0.3	±0.8	±2	±4	TITLE QT70ML OUTLINE DRAWING			MODEL QT70ML				
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'					DWG. NO. QT70ML_OUT			
	10~50	±0°30'		±1°					SCALE N/S			
	50~120	±0°20'		±0°30'					SIZE A4		REV 00	
	120~400	±0°10'		±0°13'					SHEET 1/1			

Qlight

A4(297X210)