




LAYER	L
1	154
2	210
3	266
4	322

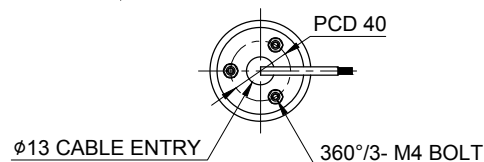

MARK	DATE	REVISION	REVISER	APP .BY
1				
2				
3				

MODEL NO			QT70ML-BZ				
MATERIAL			HOUSING-PC				
			LENS-PC				
			COVER-PC				
COLOR OF LENS			RED(    ), AMBER(    ), GREEN(    ), BLUE(    ), WHITE(    )				
KIND OF FUNCTION			USE VOLT.	STEADY	FLASHES	STROBE	REVOLVING
LED MODULE	USE VOLT.	LAYER 1 CURRNET (MAX.)	DC12V	0.100A	0.100A	0.120A	0.080A
			DC24V	0.050A	0.050A	0.120A	0.080A
			AC110V	0.020A	0.020A	-	-
			AC220V	0.020A	0.020A	-	-
BUZZER MODULE	USE VOLT.	CURRNET (MAX.)	DC12V	0.015A			
			DC24V	0.030A			
			AC110V	0.090A			
			AC220V	0.090A			
PROTECTION GRADE			WATER & DUST PROOF IP65				
CABLE ENTRY			ø8 LEAD HOLE				
COLOR OF HOUSING			MAKER STANDARD				
ACTION			LED SIGNAL TOWER LAMP				

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	⊕	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY S.H.KIM	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2019.03.20
	3~6			±0.3	±0.5							
	6~30	±0.1	±0.2	±0.5	±1							
	30~120	±0.15	±0.3	±0.8	±1.5							
	120~400	±0.2	±0.5	±1.2	±2.5							
400~1000	±0.3	±0.8	±2	±4								
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°				DWG. NO.			
	10~50	±0°30'		±1°	±2°				QT70ML-BZ_OUT			
	50~120	±0°20'		±0°30'	±1°				SCALE N/S	SIZE A4	REV 00	SHEET 1/1
	120~400	±0°10'		±0°13'	±0°30'							

**Qlight**

A4(297X210)