
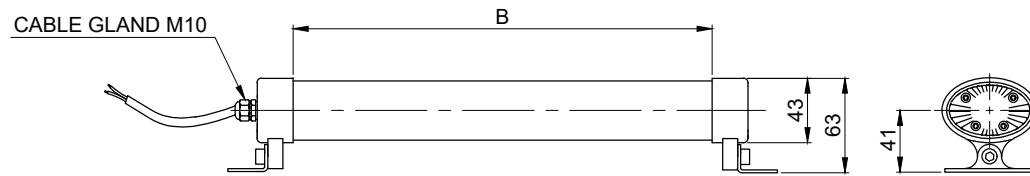
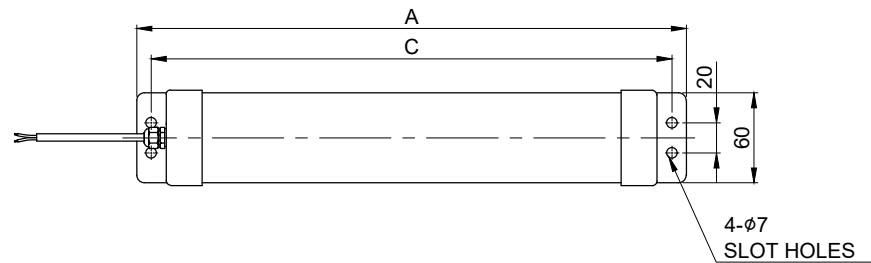




MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO		QFL/QFLC					
MATERIAL		HEAT SINK-AL					
		LENS-PC					
		SIDE COVER-AL					
MODEL		QFL-200/ QFLC-200	QFL-300/ QFLC-300	QFL-400/ QFLC-400	QFL-500/ QFLC-500	QFL-600/ QFLC-600	QFL-1200/ QFLC-1200
POWER CONSUMPTION	DC24V	4.5W	9W	13W	17W	22W	44W
	AC220V	-	-	19W	24W	26W	53W
LED		CHIP LED					
PROTECTION GRADE		WATER & DUST PROOF IP67					
CABLE ENTRY		M10					



MODEL	A	B	C
QFL/QFLC-200	240	152	220
QFL/QFLC-300	340	252	320
QFL/QFLC-400	440	352	420
QFL/QFLC-500	540	452	520
QFL/QFLC-600	640	552	620
QFL/QFLC-1200	1190	1102	1170

※POWER CABLE : CLASSIC 400P (0.75sq) x 2C 450mm

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓒ	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QT'Y	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY Y.C.KO	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2020.04.24
	3~6			±0.3	±0.5							
	6~30	±0.1	±0.2	±0.5	±1							
	30~120	±0.15	±0.3	±0.8	±1.5							
	120~400	±0.2	±0.5	±1.2	±2.5							
400~1000	±0.3	±0.8	±2	±4								
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°				DWG. NO. QFL/QFLC_OUT			
	10~50	±0°30'		±1°	±2°				SCALE N/S	SIZE A4	REV 00	SHEET 1/1
	50~120	±0°20'		±0°30'	±1°							
	120~400	±0°10'		±0°13'	±0°30'							

A4(297X210)