
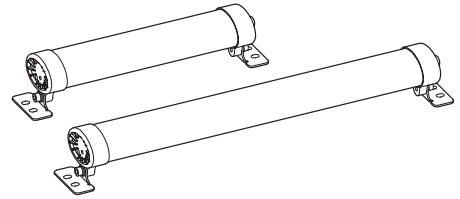


Water and Vibration Resistant LED Light Bars with IP67 Protection

QFL/ QFLC



Thank you for purchasing Qlight's products. Please read this user manual carefully prior to installation and operation to ensure safe and correct use.

⚠ Precautions for Safety

Failure to follow the instructions below may cause a loss of life or serious physical injury.

1. During wiring or maintenance, please completely turn off the power of the product. (Failure to follow this may lead to an electric shock.)
2. Do not install the product in locations that subjects it to excessive dust or water other than the conditions designated by the IP protection ratings indicated for each product. (Failure to follow these instructions may cause a fire to the product, electric shock, physical injury, malfunction or damage to the product.)
3. Do not alter or repair this product. If maintenance or repair service is required, please contact your local Qlight contact point. (Failure to follow these instructions may lead to fire, electric shock, or product damage.)
4. Please apply the correct voltage to the product. (Failure to follow these instructions may lead to fire, electric shock, or product damage.)
5. When the product is applied to a condition that may impact lives or property, please make sure to have a double safety device. (Failure to follow this may cause damage to property, fire, electric shock and loss of life.)

⚠ Precautions for Correct Use

Failure to follow the proper instructions may cause damage to property, the product, or malfunction of the product that would void the warranty.

1. Please remove any objects that can interrupt ventilation around the product.
2. Please turn off the power of the product immediately if it fails to operate properly.
3. Carefully wire the product according to each product's specification.
4. Please be careful in preventing chemicals such as thinner, benzene, etc. in contact with the surface of the product.
5. Do not apply excessive force/impact to the product.
6. Failure to follow any of the instructions above may cause malfunction or damage to the product, fire, and electric shock.

Ordering Specifications

QFL	-	200	-	24
[Model number]		[Product length]		[Voltage]
• QFL - Translucent lens				
• QFLC - Transparent lens				
• 200 - 240mm				
• 300 - 340mm				
• 400 - 440mm				
• 500 - 540mm				
• 600 - 640mm				
• 1,200 - 1,190mm				
• 24 - DC24V				
• 220 - AC220V				
(Except QFL(C)-200/300)				



Please scan the QR code for more detailed product information.

www.qlight.com

Product Specifications

■ QFL - Optics Specifications

Model		QFL-200	QFL-300	QFL-400	QFL-500	QFL-600	QFL-1200
Lens color		Translucent	Translucent	Translucent	Translucent	Translucent	Translucent
Light color (Standard)		Cool daylight					
Color temperature (Standard)		6,000-7,000K					
Luminous flux	DC	350lm	680lm	900lm	1,400lm	1,700lm	3,400lm
	AC	-	-	1,200lm	1,800lm	2,200lm	4,400lm
Illumination (at 1m)	DC	140Lux	250Lux	380Lux	500Lux	600Lux	1,200Lux
	AC	-	-	450Lux	600Lux	800Lux	1,600Lux

■ QFL - General Product Specifications

Model		QFL-200	QFL-300	QFL-400	QFL-500	QFL-600	QFL-1200
Rated voltage		DC24V					
		AC220V(Except QFL-200/300)					
Range for operation voltage		DC21.5V-26.5V/ AC198V-245V					
Power consumption		6W	10W	15W	20W	25W	50W
		-	-	25W	30W	35W	70W
Insulation resistance		Min. 100MΩ(500V DC mega ohm meter)					
Withstanding voltage		DC: 500VAC, 60Hz, 1 minute/AC: 1,500VAC, 60Hz, 1 minute					
Operating temperature		-30°C to +50°C					
Protection rating		IP67					
Materials		Lens-PC, Side Cover-Al, Heat sink-Al, Bracket-SPC-1					
Certificate		CE					
Weight(approx.)		0.44kg	0.51kg	0.66kg	0.74kg	0.85kg	1.38kg
		-	-	0.68kg	0.77kg	0.87kg	1.49kg

※ CE Compliant: DC24V(Except QFL-1200 DC24V), AC220V(CE SMPS applied upon request as an order specification)

■ QFLC - Optics Specifications

Model		QFLC-200	QFLC-300	QFLC-400	QFLC-500	QFLC-600	QFLC-1200
Lens color		Transparent	Transparent	Transparent	Transparent	Transparent	Transparent
Light color (Standard)		Cool daylight					
Color temperature (Standard)		6,000-7,000K					
Luminous flux	DC	400lm	800lm	1,200lm	1,500lm	2,000lm	4,200lm
	AC	-	-	1,400lm	2,000lm	2,500lm	5,000lm
Illumination (at 1m)	DC	150lux	300Lux	460Lux	600Lux	780Lux	1,500Lux
	AC	-	-	550Lux	800Lux	900Lux	1,800Lux

■ QFLC - General Product Specifications

Model		QFLC-200	QFLC-300	QFLC-400	QFLC-500	QFLC-600	QFLC-1200
Rated voltage		DC24V					
		AC220V(Except QFLC-200/300)					
Range for operation voltage		DC21.5V-26.5V/ AC198V-245V					
Power consumption		6W	10W	15W	20W	25W	50W
		-	-	25W	30W	35W	70W
Insulation resistance		Min. 100MΩ(500V DC mega ohm meter)					
Withstanding voltage		DC: 500VAC, 60Hz, 1 minute/AC: 1,500VAC, 60Hz, 1 minute					
Operating temperature		-30°C to +50°C					
Protection rating		IP67					
Materials		Lens-PC, Side Cover-Al, Heat sink-Al, Bracket-SPC-1					
Certificate		CE					
Weight(approx.)		0.44kg	0.51kg	0.66kg	0.74kg	0.85kg	1.38kg
		-	-	0.68kg	0.77kg	0.87kg	1.49kg

※ CE Compliant: DC24V(Except QFL-1200 DC24V), AC220V(CE SMPS applied upon request as an order specification)

(Units : mm)

Technical drawing of the M10 cable gland showing front, side, and end views with dimensions.

Front View: Dimensions include overall length A , mounting hole center-to-center distance C , and mounting hole diameter $\varnothing 20$. The end view shows a circular profile with a diameter of 10 and a mounting hole diameter of 7.


Side View: Dimensions include overall height B , mounting hole center-to-center distance 43 , and mounting hole diameter $\varnothing 63$. The end view shows a circular profile with a diameter of 41.

End View: Dimensions include overall diameter 95° and mounting hole center-to-center distance 41 . The end view shows a circular profile with a diameter of 41.


Labels: 4- $\varnothing 7$ SLOTT HOLES, FITTING HOLES, CABLE ENTRY M10, SIDE VIEW.

MODEL	A	B	C
QFL/ QFLC-200	240	152	220
QFL/ QFLC-300	340	252	320
QFL/ QFLC-400	440	352	420
QFL/ QFLC-500	540	452	520
QFL/ QFLC-600	640	552	620
QFL/ QFLC-1200	1190	1102	1170

DC/ AC



- QFL/ QFLC

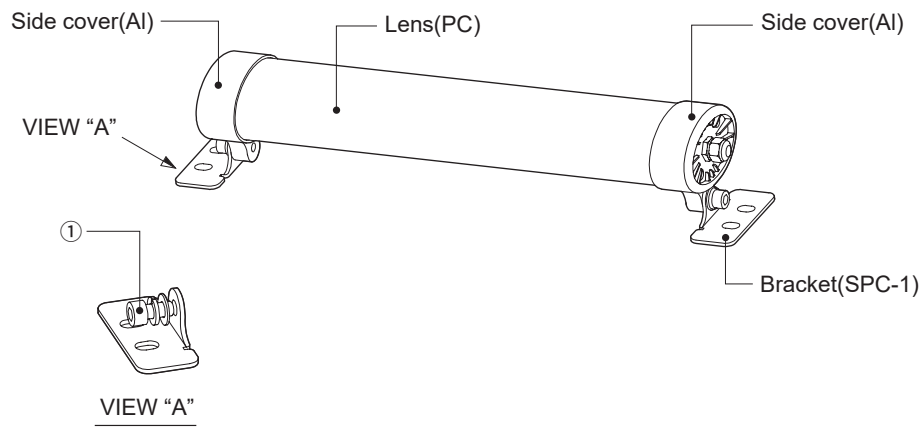


3

Installation/ Mounting Hole Specifications


■ Installation

- First, machine taps or holes on the mounting surface ①.
- The mounting hole of this product is 7mm in diameter(long hole).
- When machining taps, fasten the bolt through the mounting hole of the product.
- When machining holes, insert the bolt through the hole of the product, and tighten the nut from the opposite side of the mounting surface.
(When assembling using bolt and nut, please make sure to use flat washer and spring washer.)

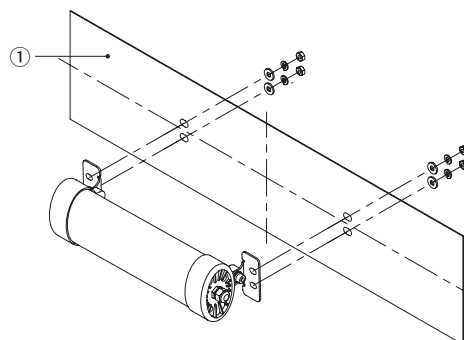

■ Mounting Hole Specifications

- Machine holes on the mounting surface referring to the diagram below.

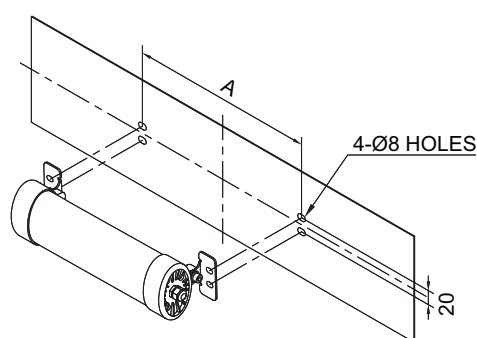

MODEL	A
QFL/ QFLC-200	220
QFL/ QFLC-300	320
QFL/ QFLC-400	420
QFL/ QFLC-500	520
QFL/ QFLC-600	620
QFL/ QFLC-1200	1170

QFL/ QFLC-200/ 300/ 400/ 500/ 600/ 1200

Installation Environment and Protection Rating

- This product is designed for use with protection rating of IP67.
- If the product is installed in locations that subject it to excessive dust or water other than the designated IP protection rating indicated(IP67), it may cause malfunction or damage to the product.
- For further information, please visit our website(www.qlight.com).


Product installation direction

- Install the product in accordance with the manual. Otherwise rainwater or moisture may penetrate into the product.

· BEACON/SIGNALING LIGHT

※ For products with a protection rating of less than IPX4, please install it vertically.

Power cord inlet part shall not be facing the sky.

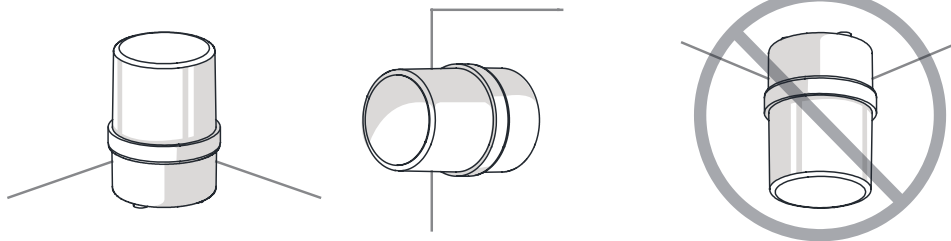


· ELECTRONIC SOUNDER/SIGNAL HORN

Sounder part shall not be facing the sky.



· HEAVY-DUTY & EXPLOSION PROOF SIGNALINGS

Sounder part shall not be facing the sky.

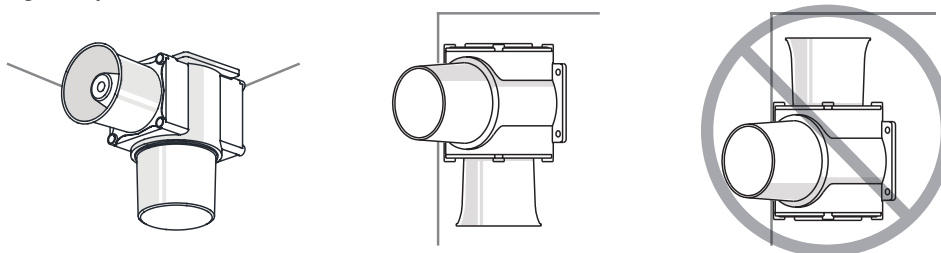


· SIGNAL TOWER LIGHTS

※ For products with a protection rating of less than IPX4, please install it vertically.

Power cord inlet part shall not be facing the sky.





For your safety

Specification and dimensions listed in this catalogue subject to change without notice for product quality improvement.
The newest product information is available on our website.(www.qlight.com)
Please read the instruction manual attached to the product carefully before installation and use.

Qlight Co., Ltd. www.qlight.com | trade@qlight.com

Head Office | Suite #1510, STX-V Tower, 128 Gasan digital 1-ro, Geumcheon-gu, Seoul, Korea

Tel. +82-2-2679-6152(Toll free. +82-80-328-2222) Fax. +82-2-2679-6154

Factory | 185-25, Mukbang-ro, Sangdong-myeon, Gimhae-si, Gyeongsangnamdo, Korea Tel. +82-55-328-1111(Toll free. +82-80-328-1111)

Qlight Overseas Sales Dept | 704 Nakdong-daero, Sasang-gu, Busan, Korea(Eomgung-Dong) Tel.+82-51-620-4100

Qlight Public Relations & Marketing Team Office | 704 Nakdong-daero, Sasang-gu, Busan, Korea(Eomgung-Dong) Tel. +82-51-245-0017

SHANGHAI Qlight Electronic Co., Ltd. www.qlight.com www.qlightcn.com | qlightcn@qlight.com

China Factory/ Shanghai Sales Office | #Room 333 Building B, #11, Lane 450, Zhenda Road, Baoshan District, Shanghai, China

Tel. +86-21-6651-7100 Fax. +86-21-6315-3929

China Factory Site 2 (Qidong) | #33, Haiyan Road, Qidong High-tech Industrial Development Zone, Qidong, Jiangsu Province, China

Tel +86-513-8384-9999 Fax +86-513-8384-9910

Qlightec

Innovation in Alarm & Signal

Product Operation Inquiry / Customer Support +82-51-620-4100

You can expect prompt service if you have exact information such as model name, symptom, telephone number and address.

※ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Head office-Suite #1510, STX-V Tower, 128 Gasan digital 1-ro, Geumcheon-gu, Seoul, Korea (Postal Code-08507)

Factory-185-25, Mukbang-Ro, Sangdong-Myeon, Gimhae-Si, Gyeongsangnam-Do, Korea (Postal Code-50805)

www.qlight.com

EN - QFL-200 - 2403A