


MARK	DATE	REVISION	REVISER	APP. BY
①				
②				
③				

MODEL NO			STA45SLMP			
MATERIAL			HOUSING-AL			
			LENS-ACRYLIC			
			FILTER LENS-AS			
COLOR OF LENS			RED(), AMBER(), GREEN(), BLUE(), WHITE()			
USE VOLT.	LED	CURRENT	DC12V	0.08W	0.100A	LAYER1
			DC24V		0.050A	LAYER1
VOLUME		MAX. 90dB at 1m				
PROTECTION GRADE		WATER & DUST PROOF IP44 (Buzzer Type IP23)				
COLOR OF HOUSING		MAKER STANDARD				
ACTION		LED STEADY LIGHT				

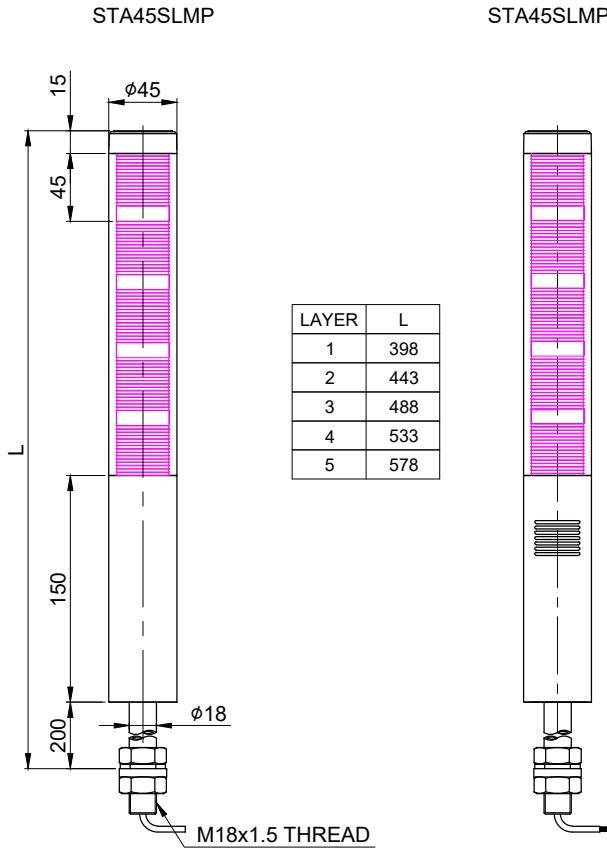

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH		-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v			Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-			DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	3~6			±0.3	±0.5			S.H.KIM	J.H.PARK		J.K.HAN	3	2020.10.26
	6~30	±0.1	±0.2	±0.5	±1			TITLE STA45SLMP OUTLINE DRAWING					
	30~120	±0.15	±0.3	±0.8	±1.5								
	120~400	±0.2	±0.5	±1.2	±2.5			MODEL STA45SLMP					
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4								
	0~10	±1°		±1°30'	±3°			DWG. NO. STA45SLMP_OUT					
	10~50	±0°30'		±1°	±2°								
	50~120	±0°20'		±0°30'	±1°			SCALE N/S SIZE A4 REV 00 SHEET 1/1					
	120~400	±0°10'		±0°13'	±0°30'								

Qlight