




| MARK | DATE | REVISION | REVISER | APP. BY |
|------|------|----------|---------|---------|
| ①    |      |          |         |         |
| ②    |      |          |         |         |
| ③    |      |          |         |         |

|                  |     |                                 |       |              |
|------------------|-----|---------------------------------|-------|--------------|
| MODEL NO         |     | QML-150-D                       |       |              |
| MATERIAL         |     | BODY-AL                         |       |              |
|                  |     | LENS-TEMPERED GLASS             |       |              |
|                  |     | COVER-AL                        |       |              |
|                  |     | -                               |       |              |
| COLOR OF LENS    |     | TRANSLUCENT                     |       |              |
| USE VOLT.        | LED | POWER CONSUMPTION               | DC24V | CHIP LED 14W |
| PROTECTION GRADE |     | WATER & DUST PROOF IP67 / IP69K |       |              |
| CABLE ENTRY      |     | M12                             |       |              |

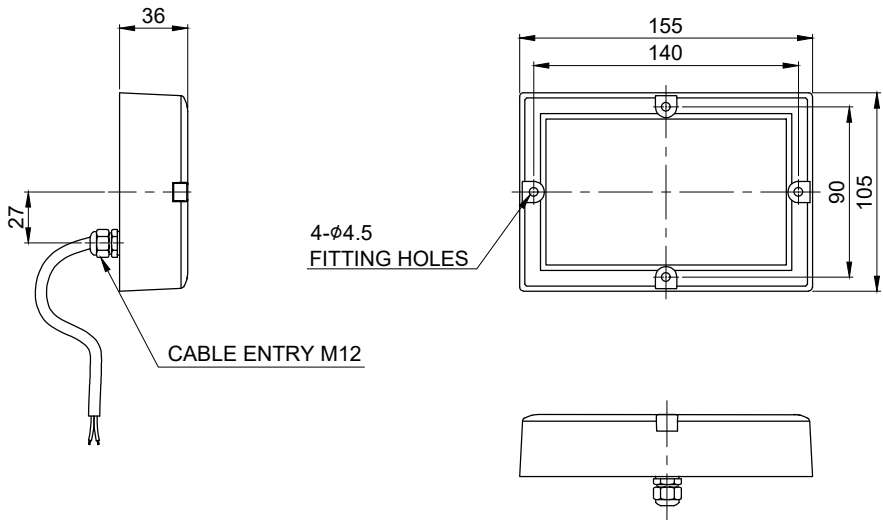

※ POWER CABLE : Dura & Flex-F VU(0.5sq X 2C) 450mm

| ISO2768-1 : CLASS OF TOLERANCE |          |        |      |        |        | SURFACE<br>FINISH   | -        | -   | -             | -     | 1          | -         |
|--------------------------------|----------|--------|------|--------|--------|---|----------|---|---------------|-------|------------|-----------|
| FOR<br>LINEAR<br>DIMENSIONS    | 0.5~3    | f      | m    | Ⓢ      | v      |   | Nr.      | DWG. NO.  | TITLE/ NAME   | MAT'L | QTY        | REFERENCE |
|                                | 3~6      | ±0.05  | ±0.1 | ±0.2   | -      | DSND BY   | CHKD BY  | CHKD BY   | APRV BY       | VIEW  | DATE       |           |
|                                | 6~30     | ±0.1   | ±0.2 | ±0.5   | ±1     | S.H.KIM   | J.H.PARK |  | J.K.HAN       | 3     | 2019.03.20 |           |
|                                | 30~120   | ±0.15  | ±0.3 | ±0.8   | ±1.5   | TITLE   |          |   | MODEL         |       |            |           |
|                                | 120~400  | ±0.2   | ±0.5 | ±1.2   | ±2.5   | QML-150-D   |          |   | QML-150-D     |       |            |           |
|                                | 400~1000 | ±0.3   | ±0.8 | ±2     | ±4     | OUTLINE DRAWING   |          |   |               |       |            |           |
| FOR ANGULAR<br>DIMENSIONS      | 0~10     | ±1°    |      | ±1°30' | ±3°    |  |          |   | DWG. NO.      |       |            |           |
|                                | 10~50    | ±0°30' |      | ±1°    | ±2°    |   |          |   | QML-150-D_OUT |       |            |           |
|                                | 50~120   | ±0°20' |      | ±0°30' | ±1°    |   |          |   | SCALE         | SIZE  | REV        | SHEET     |
|                                | 120~400  | ±0°10' |      | ±0°13' | ±0°30' |   |          |   | N/S           | A4    | 00         | 1/1       |