



S150RL / S150RS



S150RL-FT / S150RS-FT

PRODUCT SPECIFICATION

S150RL | S150RS

Materials Lens-PC, Housing-STS,
Reflector-Heat resistant ABS, Mounting bracket-STS316L
Ambient operating temperature -30°C to +50°C
Protection rating IP44
Flashing rate 60-80/min

- Stainless Steel(STS) housing allows excellent anti-corrosiveness and durability
- Can select between standard and built-in buzzer type depending on installation environment
- Mounting bracket allows convenient installation in case of XXX-FT typ

S150RL / S150RL-FT LED Steady/Flashing Signal Light

Model number	Voltage	Current	Certificates	Weight	Color
S150RL	DC12V-24V	Max.0.300A		0.64kg	● R-Red
S150RL-FT	AC110V	0.065A	-	0.92kg	● A-Amber
	AC220V	0.035A		0.92kg	● G-Green
					● B-Blue

- Built-in switch for selection between steady and flashing mode

S150RS / S150RS-FT Xenon Lamp Strobe Signal Lights


Model number	Voltage	Current	Xenon lamp			Certificates	Weight	Color
			Spec	Standard	Parts no			
S150RS	DC12V -24V	Max. 1.300A	200V	EUB0641 -1A(G)	48	-	0.68kg	● R-Red
S150RS-FT	AC110V	0.160A	-550V	U Type			0.66kg	● A-Amber
	AC220V	0.140A					0.66kg	● G-Green
								● B-Blue

- Connector type lamp socket allows convenient lamp replacement


Technical Diagram

Units: mm

·S150RL / S150RS



·S150RL-FT / S150RS-FT

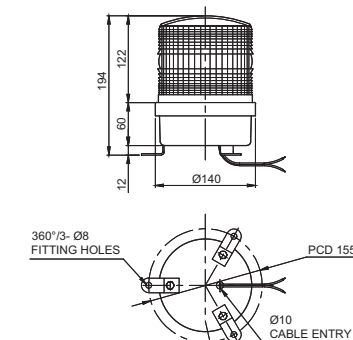

Wiring Instructions

- External Power line - UL1015 AWG18(0.75sq) x 2C 400mm
- This product can be wired regardless of polarity.

Customization

- Hyper illuminance xenon lamp type(model number: S150RHS/S150RHS-FT)

Ordering Specification

S150RS	-	220	-	R
[Model number]		[Voltage]		[Color]
S150RL		12/24-DC12V-24V		● R-Red
S150RL-FT		110-AC110V		● A-Amber
S150RS		220-AC220V		● G-Green
S150RS-FT				● B-Blue