




| MARK | DATE | REVISION | REVISER | APP.BY |
|------|------|----------|---------|--------|
| ① | | | | |
| ② | | | | |
| ③ | | | | |

| | | | | | |
|------------------|-----|---------------------------------|-------|----------|-----|
| MODEL NO | | QML-250-D | | | |
| MATERIAL | | BODY-AL | | | |
| | | LENS-TEMPERED GLASS | | | |
| | | COVER-AL | | | |
| | | - | | | |
| COLOR OF LENS | | TRANSLUCENT | | | |
| USE VOLT. | LED | POWER CONSUMPTION | DC24V | CHIP LED | 30W |
| PROTECTION GRADE | | WATER & DUST PROOF IP67 / IP69K | | | |
| CABLE ENTRY | | M12 | | | |

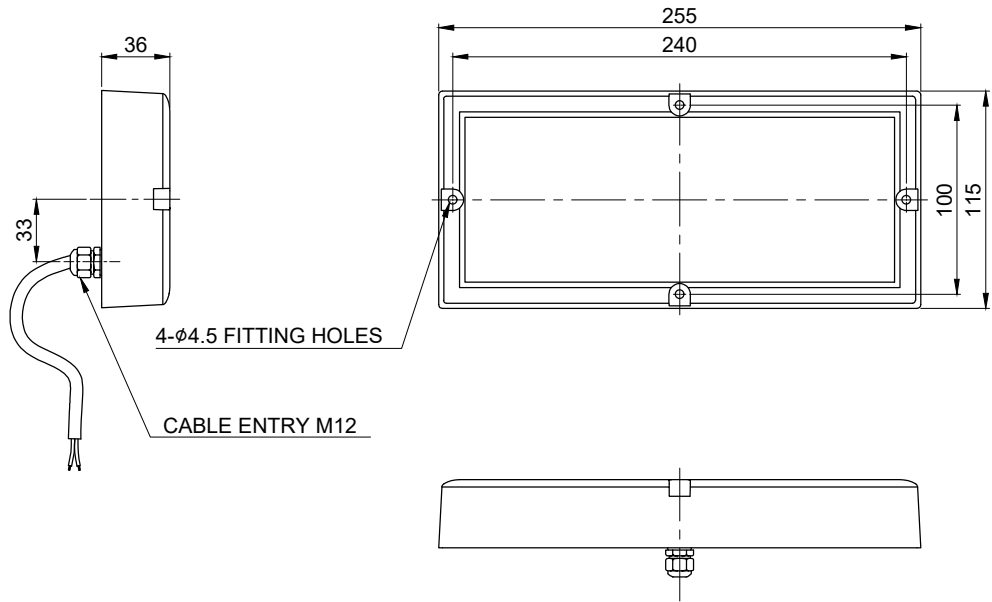

※ POWER CABLE : Dura & Flex-F VU(0.5sq X 2C) 450mm

| ISO2768-1 : CLASS OF TOLERANCE | | | | | | SURFACE FINISH | - | - | - | - | 1 | - |
|--------------------------------|----------|--------|------|--------|--------|---|-----|----------|---|---------|------|------------|
| FOR LINEAR DIMENSIONS | 0.5~3 | f | m | Ⓢ | v | | Nr. | DWG. NO. | TITLE/ NAME | MAT'L | QT'Y | REFERENCE |
| | 3~6 | ±0.05 | ±0.1 | ±0.2 | - | DSND BY | | CHKD BY | CHKD BY | APRV BY | VIEW | DATE |
| | 6~30 | ±0.1 | ±0.2 | ±0.5 | ±1 | S.H.KIM | | J.H.PARK |  | J.K.HAN | 3 | 2019.03.20 |
| | 30~120 | ±0.15 | ±0.3 | ±0.8 | ±1.5 | TITLE | | | MODEL | | | |
| | 120~400 | ±0.2 | ±0.5 | ±1.2 | ±2.5 | QML-250-D | | | QML-250-D | | | |
| | 400~1000 | ±0.3 | ±0.8 | ±2 | ±4 | OUTLINE DRAWING | | | | | | |
| FOR ANGULAR DIMENSIONS | 0~10 | ±1° | | ±1°30' | ±3° |  | | | DWG. NO. | | | |
| | 10~50 | ±0°30' | | ±1° | ±2° | | | | QML-250-D_OUT | | | |
| | 50~120 | ±0°20' | | ±0°30' | ±1° | | | | SCALE | SIZE | REV | SHEET |
| | 120~400 | ±0°10' | | ±0°13' | ±0°30' | | | | N/S | A4 | 00 | 1/1 |