
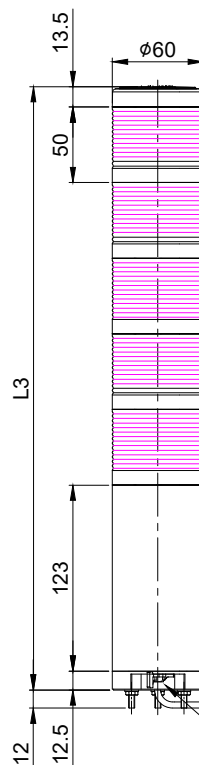
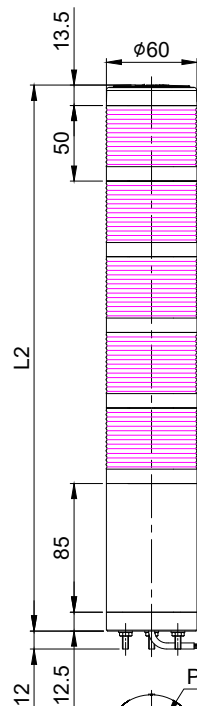



QTG(A)60ML : DC
QTG(A)60MLF : DC
QTG(A)60ML-BZ : DC

QTG(A)60ML : AC
QTG(A)60MLF-BZ : DC

QTG(A)60MLF : AC
QTG(A)60ML-BZ : AC
QTG(A)60MLF-BZ : AC

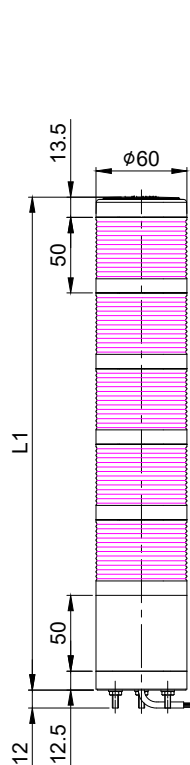

BUZZER VOLUME
CONTROL LEVER

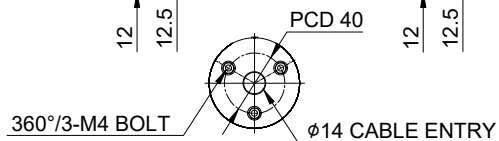

MARK	DATE	REVISION	REVISER	APP.BY
1				
2				
3				

MODEL NO			QTG(A)60ML/ ML-BZ/ QTG(A)60MLF/ MLF-BZ			
MATERIAL			HOUSING-ABS			
			LENS-PC			
			-			
COLOR OF LENS			RED(), AMBER(), GREEN(), BLUE(), WHITE()			
FLASHES. PER MIN			60 ~ 80			
USE VOLT.	LED	CURRNET	DC12V	0.5W	0.100A/LAYER1	
			DC24V		0.070A/LAYER1	
			AC110V		MAX. 0.055A/LAYER1	
			AC220V			
VOLUME			MAX. 85dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP65 (BZ TYPE-IP54)			
CABLE ENTRY			φ14 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			LED STEADY / FLASHING LIGHT			

LAYER	L1	L2	L3
1	126	161	199
2	176	211	249
3	226	261	299
4	276	311	349
5	326	361	399

ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS	0.5~3	f	m	Ⓢ	v
	3~6	±0.05	±0.1	±0.2	-
	6~30	±0.1	±0.2	±0.5	±1
	30~120	±0.15	±0.3	±0.8	±1.5
	120~400	±0.2	±0.5	±1.2	±2.5
	400~1000	±0.3	±0.8	±2	±4
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°
	10~50	±0°30'		±1°	±2°
	50~120	±0°20'		±0°30'	±1°
	120~400	±0°10'		±0°13'	±0°30'

SURFACE
FINISH

Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
S.H.KIM	J.H.PARK		J.K.HAN	3	2019.03.20
TITLE			MODEL		
QTG60ML SERIES OUTLINE DRAWING			QTG60ML SERIES		
			DWG. NO.		
			QTG60ML SERIES_OUT		
SCALE	SIZE	REV	SHEET		
N/S	A4	00	1/1		