

S80 Series



Enhanced visibility by adopting a diffusion lens

PRODUCT SPECIFICATION

S80LS

Materials Lens-AS, Housing-ABS

Ambient operating temperature -30°C to +50°C

Protection rating IP65

Flashing rate 60-80/min

- Ø80mm LED strobe signal light
- Extremely bright signal light that reduces attenuation of the signal light
- Excellent visibility in daytime as bulb or xenon lamp
- Vibration and water resistance product



S80LS

S80LS LED Strobe Signal Light for Forklift

Model number	Voltage	Current	Certificates	Weight	Color
S80LS	DC12V-24V	Max.0.190A	CE UL	0.25kg	<ul style="list-style-type: none"> ● R-Red ● A-Amber ● G-Green ● B-Blue


※ DC type model has a free-voltage range of 10V-30V

※ UL compliant: DC24V

Technical Diagram

Units: mm

·S80LS

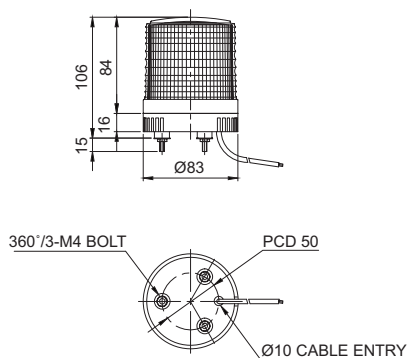

Wiring Instructions

- External Power line - UL2095 AWG20(0.5sq) x 2C 400mm
- This product can be wired regardless of polarity.

Ordering Specification

S80LS	-	12/24	-	R
[Model number]		[Voltage]		[Color]
S80LS		12/24-DC12V-24V		<ul style="list-style-type: none"> ● R-Red ● A-Amber ● G-Green ● B-Blue