


MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO		QAP80BZ			
MATERIAL		HOUSING-ABS			
		RESONANCE CHAMBER-ABS			
		-			
COLOR OF HOUSING		MAKER STANDARD			
USE VOLT.	CURRNET	DC12V		0.350A	
		DC24V		0.175A	
VOLUME				MAX. 105dB at 1m	
PROTECTION GRADE				WATER & DUST PROOF - IP65	
CABLE ENTRY				ø10 CABLE ENTRY	

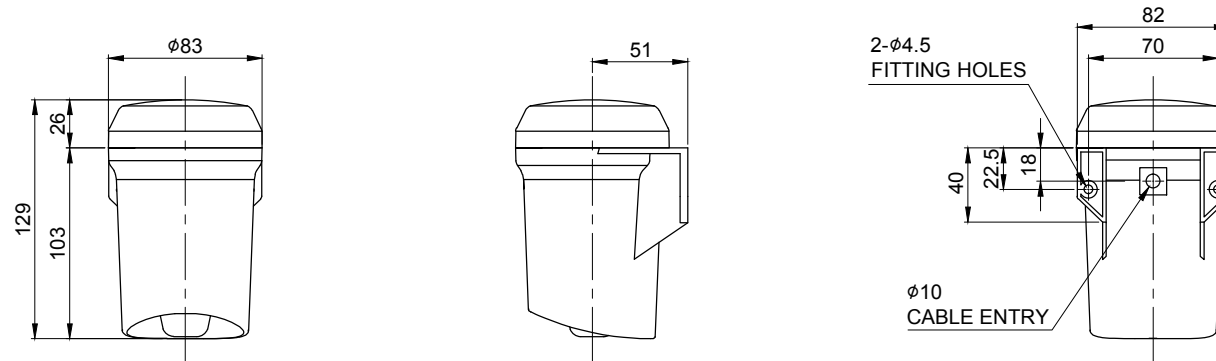

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH		-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	(C)	v			Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-			DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	3~6			±0.3	±0.5			S.H.KIM	J.H.PARK		J.K.HAN	3	2019.03.20
	6~30	±0.1	±0.2	±0.5	±1								
	30~120	±0.15	±0.3	±0.8	±1.5								
	120~400	±0.2	±0.5	±1.2	±2.5								
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4								
	0~10	±1°		±1°30'	±3°								
	10~50	±0°30'		±1°	±2°								
	50~120	±0°20'		±0°30'	±1°								
	120~400	±0°10'		±0°13'	±0°30'								

Qlight

QAP80BZ

QAP80BZ_OUT

SCALE	SIZE	REV	SHEET
N/S	A4	00	1/1

A4(297X210)