
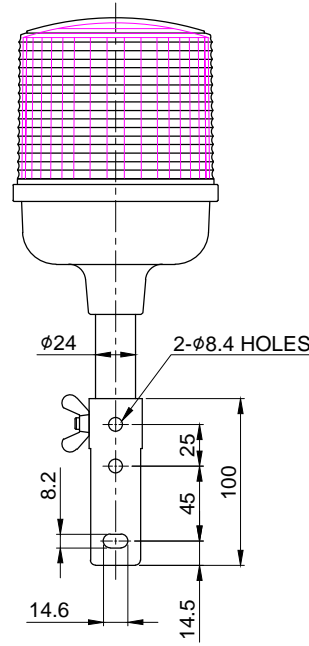
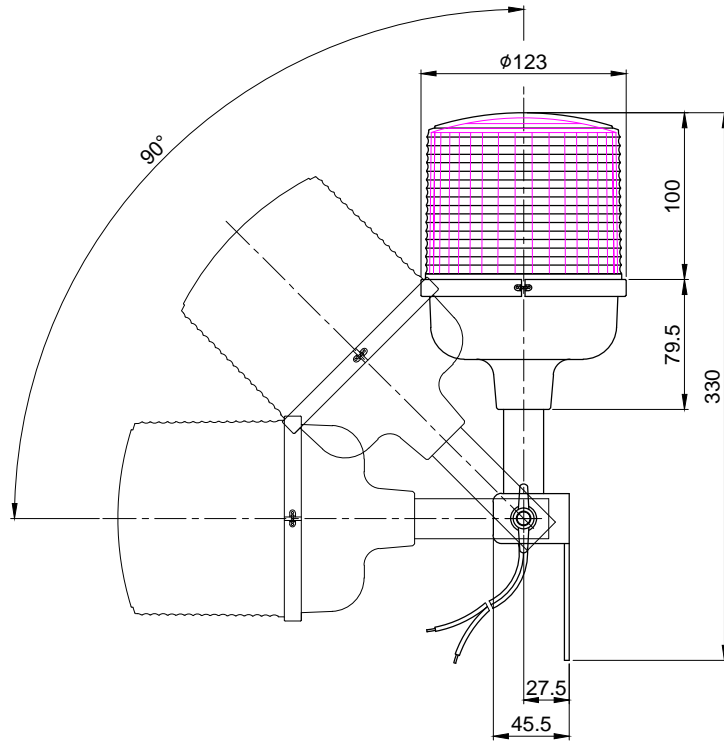



MARK	DATE	REVISION	REVISER	APP.BY
①				
②				
③				

MODEL NO	QA125HLSP				
MATERIAL	LENS-PC				
	HOUSING-PC				
	POLE-SUS				
	BRACKET-SPCC				
COLOR OF LENS	RED(), AMBER()				
FLASHES PER MIN.	60 ~ 80				
USE VOLT.	LED	CURRENT	DC12V ~ 24V	0.2W	MAX. 1.650A
PROTECTION GRADE	WATER & DUST PROOF IP66				
CABLE ENTRY	φ10 LEAD HOLE				
COLOR OF HOUSING	MAKER STANDARD				
ACTION	LED STROBE LAMP LIGHT				



ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-											
FOR LINEAR DIMENSIONS		f	m	Ⓒ	v		Nr.	DWG. NO.		TITLE/ NAME		MAT'L		QTY	REFERENCE			
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY S.H.KIM	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2016.10.05						
	3~6			±0.3	±0.5													
	6~30	±0.1	±0.2	±0.5	±1													
	30~120	±0.15	±0.3	±0.8	±1.5													
	120~400	±0.2	±0.5	±1.2	±2.5													
400~1000	±0.3	±0.8	±2	±4														
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°								DWG. NO. QA125HLSP_OUT					
	10~50	±0°30'		±1°	±2°								SCALE N/S				SIZE A4	REV 00
	50~120	±0°20'		±0°30'	±1°													
	120~400	±0°10'		±0°13'	±0°30'													

Qlight

A4(297X210)