


1 2 3 4 5 6

A


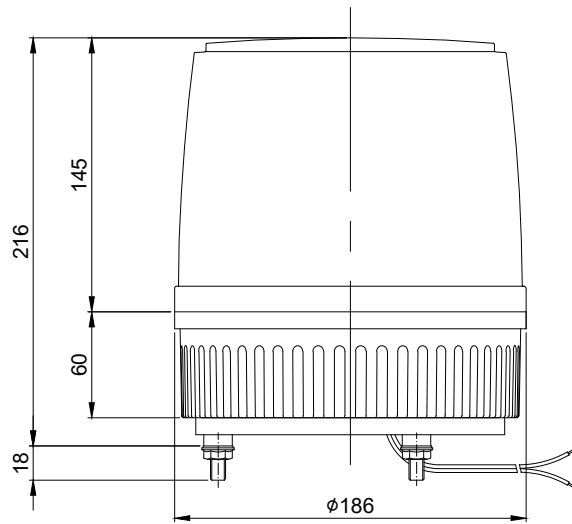


MARK	DATE	REVISION	REVISER	APP.BY
①				
②				
③				

A

MODEL NO			S180UHS			
MATERIAL			HOUSING-ABS			
			LENS-ABS			
COLOR OF LENS			RED(    ), AMBER(    ), GREEN(    ), BLUE(    )			
FLASHES PER MIN.			60 ~ 80 (2 time consecutively flashingff or two in a row)			
USE VOLT.	XENON	CURRENT	DC12V	16W	MAX. 2.277A	
			DC24V		MAX. 1.055A	
			AC110V		MAX. 0.711A	
			AC220V		MAX. 0.422A	
VOLUME			MAX. 90dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP44			
CABLE ENTRY			ø10 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			HYPER XENON LAMP STROBE LIGHT			

B

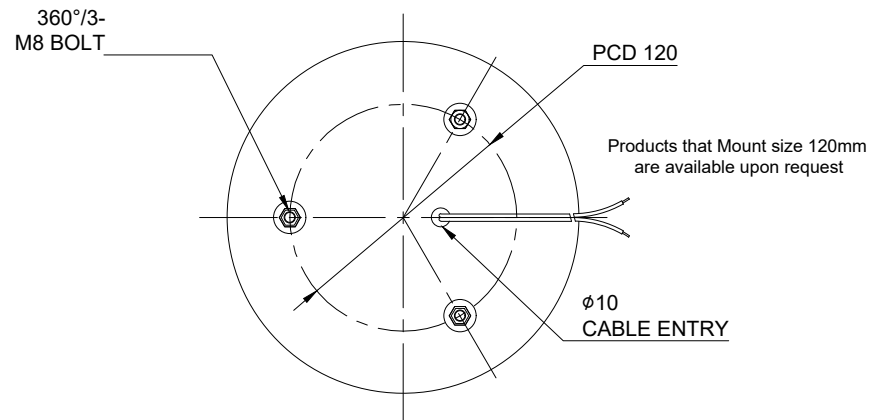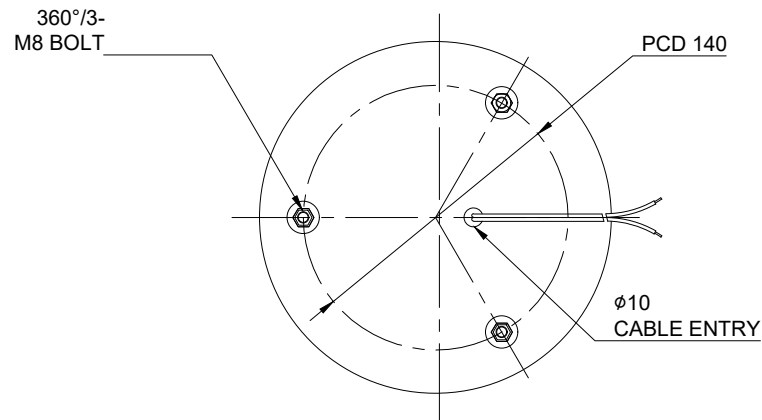

C

C

D

D

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH		-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v			Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-			DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	3~6			±0.3	±0.5			S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30
	6~30	±0.1	±0.2	±0.5	±1			TITLE			MODEL		
	30~120	±0.15	±0.3	±0.8	±1.5			S180UHS			S180UHS		
	120~400	±0.2	±0.5	±1.2	±2.5			OUTLINE DRAWING			S180UHS_OUT		
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4						DWG. NO.		
	0~10	±1°		±1°30'	±3°						SCALE		
	10~50	±0°30'		±1°	±2°						SIZE		
	50~120	±0°20'		±0°30'	±1°						REV		
	120~400	±0°10'		±0°13'	±0°30'						SHEET		
											A4		
											00		
											1/1		

1 2 3 4 5 6

A4(297X210)