


MARK	DATE	REVISION	REVISER	APP.BY
①				
②				
③				

MODEL NO			STC45L			
MATERIAL			HOUSING-ABS			
			LENS-PC			
			POLE-AL			
COLOR OF LENS			CLEAR			
FLASHING PER MIN.			60 ~ 80			
USE VOLT.	LED	CURRENT	DC12V	0.08W	MAX. 0.110A	
			DC24V		MAX. 0.105A	
			AC110V		MAX. 0.065A	
			AC220V		MAX. 0.045A	
VOLUME			MAX. 90dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP44(Buzzer Type IP23)			
CABLE ENTRY			ø8 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			MULTIPLE COLORS LED SIGNAL STEADY/ FLASHING LIGHT			

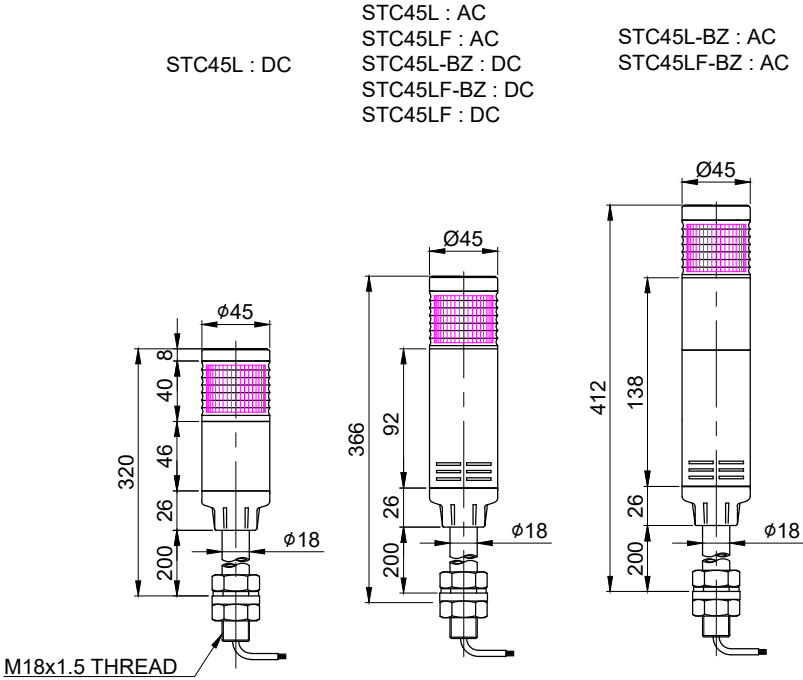

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	3~6			±0.3	±0.5		S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30
	6~30	±0.1	±0.2	±0.5	±1		TITLE					
	30~120	±0.15	±0.3	±0.8	±1.5		STC45L			MODEL		
	120~400	±0.2	±0.5	±1.2	±2.5		OUTLINE DRAWING			STC45L		
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4					DWG. NO.		
	0~10	±1°		±1°30'	±3°					STC45L_OUT		
	10~50	±0°30'		±1°	±2°					SCALE	SIZE	REV
	50~120	±0°20'		±0°30'	±1°					N/S	A4	00
	120~400	±0°10'		±0°13'	±0°30'						SHEET	1/1