

Ø56mm LED Steady/Flashing Tower Lights

ST56MEL-BZ-2-24-RG-TR



ST56MEL-BZ-2-24-RG-TR

PRODUCT SPECIFICATION

ST56MEL-BZ-2-24-RG-TR

Materials Lens-AS, Housing-ABS
Ambient operating temperature -30°C to +60°C
Volume Max.90dB at 1m
Protection rating IP23
Flashing rate 60-80/min
Compliant with RoHS directive


- Injection machine specialized LED steady/flashing tower lights
- Injection machine specialized LED tower lights that can choose various audible & visual signals
- Long product lifetime of over 20,000 hours with a high intensity LED

ST56MEL-BZ-2-24-RG-TR Ø56mm Direct mount, LED Steady/Flashing

Model number	Layers	Voltage	Current	Certificates	Weight	Color
ST56MEL-BZ-2-24-RG-TR	2	DC24V	0.110A	-	0.28kg	● R-Red ● G-Green

Technical Diagram ·ST56MEL-BZ-2-24-RG-TR

Units : mm

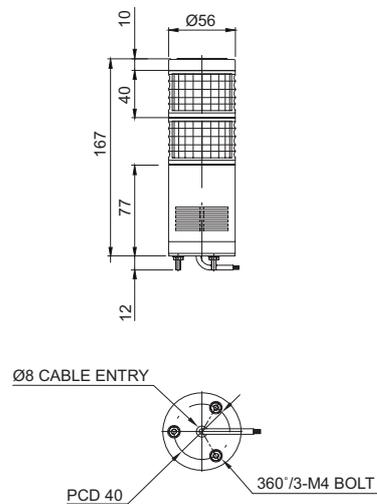

Customization

· Wall mount bracket options : Bracket structure allows for threading through the bracket hole or into the wall



Ordering Specifications

ST56MEL-BZ	-	2	-	24	-	RG
[Model number]		[Layers]		[Voltage]		[Color]
ST56MEL-BZ		2-2 Layers		24-DC24V		● R-Red ● G-Green